


Dimensions(mm)

BT30		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
BT30/GMR6/70	●	6	23	26	44.5	70	37.5	27.5	28	TR-4.0	M5x0.8(T-2.5)	0.7
BT30/GMR8/70	●	8	25	28	44.5	70	37.5	27.5	28	TR-4.0	M6x1.0(T-3.0)	0.8
BT30/GMR10/75	●	10	27	30	44.5	75	42.5	32.5	36	TR-4.0	M8x1.0(T-4.0)	0.8
BT30/GMR12/75	●	12	29	32	44.5	75	47.5	37.5	36	TR-4.0	M10x1.0(T-5.0)	0.9
BT30/GMR14/85	●	14	31	34	44.5	85	47.5	37.5	44	TR-4.0	M10x1.0(T-5.0)	0.9
BT30/GMR16/90	●	16	35	38	44.5	90	52.5	42.5	48	TR-4.0	M12x1.0(T-6.0)	1.0
BT30/GMR18/90	●	18	37	40	44.5	90	52.5	42.5	48	TR-4.0	M12x1.0(T-6.0)	1.0
BT30/GMR20/90	●	20	39	42	44.5	90	52.5	42.5	48	TR-4.0	M12x1.0(T-6.0)	1.0

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
- »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
- »All products center through coolant system.
- »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

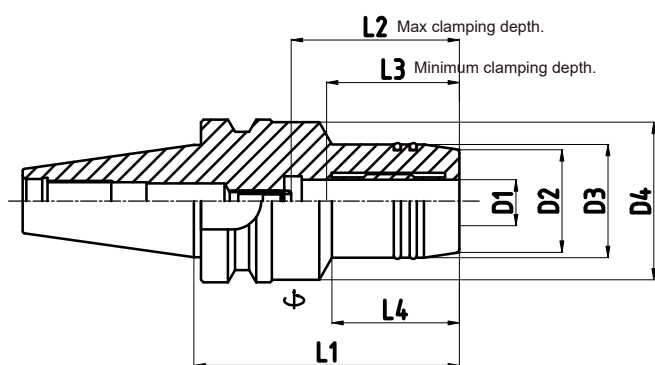

BT30