


= Dimensions(mm)

BT40		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
BT40/GMR6/65	●	6	23	26	50	65	37.5	27.5	23	TR-4.0	M5x0.8(T-2.5)	1.3
BT40/GMR6/90	●	6	23	26	50	90	37.5	27.5	44	TR-4.0	M5x0.8(T-2.5)	1.4
BT40/GMR6/140	●	6	23	26	50	140	37.5	27.5	44	TR-4.0	M5x0.8(T-2.5)	2.2
BT40/GMR8/65	●	8	25	28	50	65	37.5	27.5	23	TR-4.0	M6x1.0(T-3.0)	1.3
BT40/GMR8/90	●	8	25	28	50	90	37.5	27.5	44	TR-4.0	M6x1.0(T-3.0)	1.5
BT40/GMR8/140	●	8	25	28	50	140	37.5	27.5	44	TR-4.0	M6x1.0(T-3.0)	2.3
BT40/GMR10/65	●	10	27	30	50	65	42.5	32.5	23	TR-4.0	M8x1.0(T-4.0)	1.3
BT40/GMR10/90	●	10	27	30	50	90	42.5	32.5	44	TR-4.0	M8x1.0(T-4.0)	1.5
BT40/GMR10/140	●	10	27	30	50	140	42.5	32.5	44	TR-4.0	M8x1.0(T-4.0)	2.3
BT40/GMR12/65	●	12	29	32	50	65	47.5	37.5	23	TR-4.0	M10x1.0(T-5.0)	1.3
BT40/GMR12/90	●	12	29	32	50	90	47.5	37.5	44	TR-4.0	M10x1.0(T-5.0)	1.5
BT40/GMR12/140	●	12	29	32	50	140	47.5	37.5	44	TR-4.0	M10x1.0(T-5.0)	2.3
BT40/GMR14/65	●	14	31	34	50	65	47.5	37.5	23	TR-4.0	M10x1.0(T-5.0)	1.4
BT40/GMR14/90	●	14	31	34	50	90	47.5	37.5	44	TR-4.0	M10x1.0(T-5.0)	1.6
BT40/GMR14/140	●	14	31	34	50	140	47.5	37.5	44	TR-4.0	M10x1.0(T-5.0)	2.4
BT40/GMR16/65	●	16	35	38	50	65	52.5	42.5	23	TR-4.0	M12x1.0(T-6.0)	1.4
BT40/GMR16/90	●	16	35	38	50	90	52.5	42.5	48	TR-4.0	M12x1.0(T-6.0)	1.6
BT40/GMR16/140	●	16	35	38	50	140	52.5	42.5	48	TR-4.0	M12x1.0(T-6.0)	2.4
BT40/GMR18/75	●	18	37	40	50	75	52.5	42.5	30	TR-4.0	M12x1.0(T-6.0)	1.5
BT40/GMR18/90	●	18	37	40	50	90	52.5	42.5	48	TR-4.0	M12x1.0(T-6.0)	1.7
BT40/GMR18/140	●	18	37	40	50	140	52.5	42.5	48	TR-4.0	M12x1.0(T-6.0)	2.4
BT40/GMR20/75	●	20	39	42	50	75	52.5	42.5	30	TR-5.0	M16x1.0(T-6.0)	1.5
BT40/GMR20/90	●	20	39	42	50	90	52.5	42.5	48	TR-5.0	M16x1.0(T-6.0)	1.7
BT40/GMR20/140	●	20	39	42	50	140	52.5	42.5	48	TR-5.0	M16x1.0(T-6.0)	2.4
BT40/GMR25/100	●	25	53	57	-	100	61	51	-	TR-5.0	M16x1.0(T-6.0)	2.2
BT40/GMR25/135	●	25	53	57	-	135	61	51	-	TR-5.0	M16x1.0(T-6.0)	2.9
BT40/GMR32/105	●	32	58	62	-	105	65	55	-	TR-5.0	M16x1.0(T-6.0)	2.4
BT40/GMR32/135	●	32	58	62	-	135	65	55	-	TR-5.0	M16x1.0(T-6.0)	3.1

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
 - »Tool length can be adjusted up to 10mm.
 - »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
 - »All products center through coolant system.
 - »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

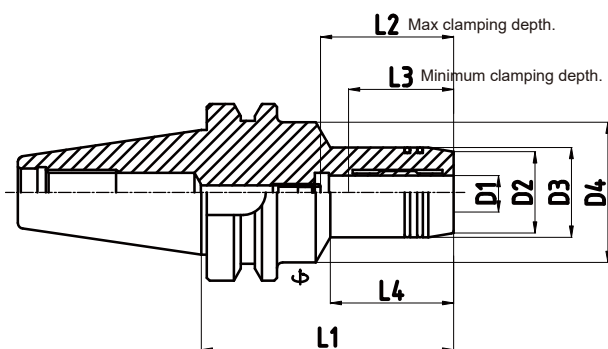

BT40