


= Dimensions(mm)

BT50		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
BT50/GMR6/90	●	6	23	26	50	90	37.5	27.5	32	TR-4.0	M5x0.8(T-2.5)	4.2
BT50/GMR6/120	●	6	23	26	50	120	37.5	27.5	44	TR-4.0	M5x0.8(T-2.5)	4.5
BT50/GMR6/140	●	6	23	26	50	140	37.5	27.5	44	TR-4.0	M5x0.8(T-2.5)	4.8
BT50/GMR8/90	●	8	25	28	50	90	37.5	27.5	32	TR-4.0	M6x1.0(T-3.0)	4.2
BT50/GMR8/120	●	8	25	28	50	120	37.5	27.5	44	TR-4.0	M6x1.0(T-3.0)	4.5
BT50/GMR8/140	●	8	25	28	50	140	37.5	27.5	44	TR-4.0	M6x1.0(T-3.0)	4.8
BT50/GMR10/90	●	10	27	30	50	90	42.5	32.5	32	TR-4.0	M8x1.0(T-4.0)	4.2
BT50/GMR10/120	●	10	27	30	50	120	42.5	32.5	44	TR-4.0	M8x1.0(T-4.0)	4.5
BT50/GMR10/140	●	10	27	30	50	140	42.5	32.5	44	TR-4.0	M8x1.0(T-4.0)	4.8
BT50/GMR12/90	●	12	29	32	50	90	47.5	37.5	32	TR-4.0	M10x1.0(T-5.0)	4.3
BT50/GMR12/120	●	12	29	32	50	120	47.5	37.5	44	TR-4.0	M10x1.0(T-5.0)	4.5
BT50/GMR12/140	●	12	29	32	50	140	47.5	37.5	44	TR-4.0	M10x1.0(T-5.0)	4.8
BT50/GMR14/90	●	14	31	34	50	90	47.5	37.5	32	TR-4.0	M10x1.0(T-5.0)	4.3
BT50/GMR14/120	●	14	31	34	50	120	47.5	37.5	44	TR-4.0	M10x1.0(T-5.0)	4.6
BT50/GMR14/140	●	14	31	34	50	140	47.5	37.5	44	TR-4.0	M10x1.0(T-5.0)	4.8
BT50/GMR16/90	●	16	35	38	50	90	52.5	42.5	32	TR-4.0	M12x1.0(T-6.0)	4.3
BT50/GMR16/120	●	16	35	38	50	120	52.5	42.5	48	TR-4.0	M12x1.0(T-6.0)	4.6
BT50/GMR16/140	●	16	35	38	50	140	52.5	42.5	48	TR-4.0	M12x1.0(T-6.0)	4.9
BT50/GMR18/90	●	18	37	40	50	90	52.5	42.5	32	TR-4.0	M12x1.0(T-6.0)	4.4
BT50/GMR18/120	●	18	37	40	50	120	52.5	42.5	48	TR-4.0	M12x1.0(T-6.0)	4.6
BT50/GMR18/140	●	18	37	40	50	140	52.5	42.5	48	TR-4.0	M12x1.0(T-6.0)	4.9
BT50/GMR20/90	●	20	39	42	50	90	52.5	42.5	32	TR-5.0	M16x1.0(T-6.0)	4.4
BT50/GMR20/120	●	20	39	42	50	120	52.5	42.5	48	TR-5.0	M16x1.0(T-6.0)	4.7
BT50/GMR20/140	●	20	39	42	50	140	52.5	42.5	48	TR-5.0	M16x1.0(T-6.0)	4.9
BT50/GMR25/105	●	25	53	57	-	105	61	51	-	TR-5.0	M16x1.0(T-6.0)	4.8
BT50/GMR25/150	●	25	53	57	-	150	61	51	-	TR-5.0	M16x1.0(T-6.0)	5.6
BT50/GMR32/115	●	32	58	62	-	115	65	55	-	TR-5.0	M16x1.0(T-6.0)	5.1
BT50/GMR32/150	●	32	58	62	-	150	65	55	-	TR-5.0	M16x1.0(T-6.0)	5.8

Availability: ● Stock ▲ Short lead time ○ Made to order

- » h6 shank tools must be used.
- » Tool length can be adjusted up to 10mm.
- » T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
- » All products center through coolant system.
- » Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

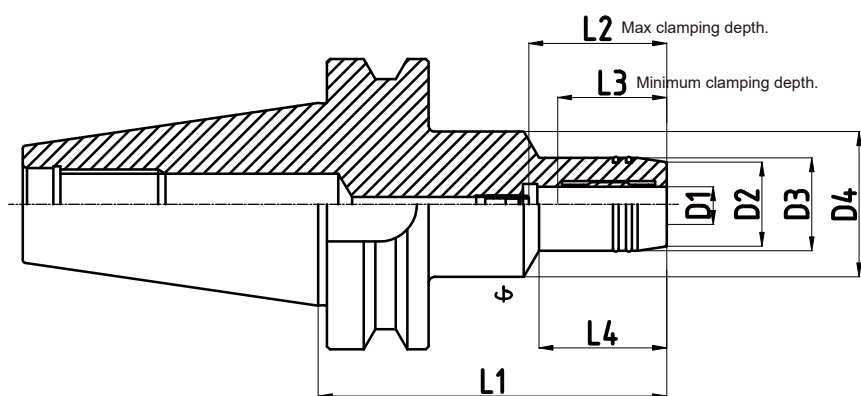

BT50