

Inch size


Dimensions(mm)

CAT40		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
CAT40/GMR037/0250	●	9.525	27.3	40	-	63.5	42.5	32.5	44.45	TR-4.0	M8x1.0(T-4.0)	1.3
CAT40/GMR050/0254	●	12.7	32	42	-	64.5	46	36	45.45	TR-4.0	M8x1.0(T-4.0)	1.3
CAT40/GMR062/0250	●	15.875	34.6	44.5	-	63.5	52.5	42.5	44.45	TR-4.0	M12x1.0(T-6.0)	1.3
CAT40/GMR075/0254	●	19.05	38	49.25	-	64.5	51	41	45.45	TR-5.0	M8x1.0(T-4.0)	1.4
CAT40/GMR100/0250	●	25.4	51	55	62.5	63.5	57	47	28	TR-5.0	M16x1.0(T-6.0)	1.5
CAT40/GMR125/0400	●	31.75	58	62	-	101.6	61	51	82.55	TR-5.0	M16x1.0(T-6.0)	2.3


CAT50		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
CAT50/GMR075/0319	●	19.05	38	49.25	-	81	51	41	61.95	TR-5.0	M8x1.0(T-4.0)	3.5
CAT50/GMR125/0319	●	31.75	58.5	72	-	81	61	51	61.95	TR-5.0	M8x1.0(T-4.0)	4.2

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
- »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
- »All products center through coolant system.
- »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

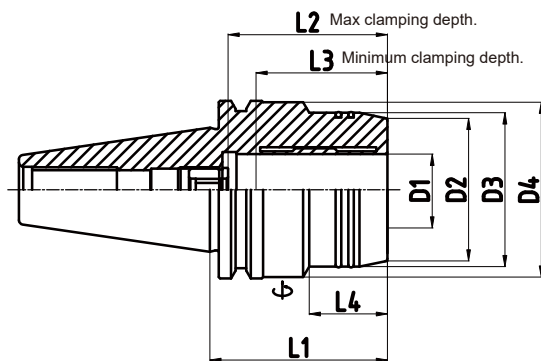

CAT40

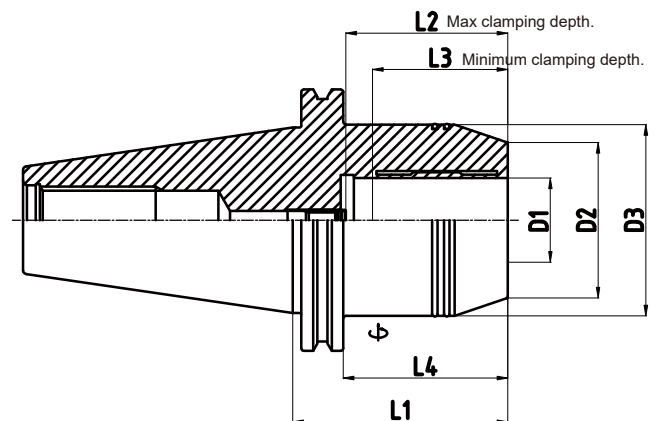

CAT50