


≡ Dimensions(mm)

HSK-A100		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
HSK-A100/GMR6/75	●	6	23	26	50	75	37.5	27.5	26	TR-4.0	M5x0.8(T-2.5)	2.6
HSK-A100/GMR8/75	●	8	25	28	50	75	37.5	27.5	26	TR-4.0	M6x1.0(T-3.0)	2.7
HSK-A100/GMR10/90	●	10	27	30	50	90	42.5	32.5	42	TR-4.0	M8x1.0(T-4.0)	2.8
HSK-A100/GMR12/95	●	12	29	32	50	95	47.5	37.5	47	TR-4.0	M10x1.0(T-5.0)	2.8
HSK-A100/GMR14/95	●	14	31	34	50	95	47.5	37.5	47	TR-4.0	M10x1.0(T-5.0)	2.8
HSK-A100/GMR16/100	●	16	35	38	50	100	52.5	42.5	53	TR-4.0	M12x1.0(T-6.0)	2.9
HSK-A100/GMR18/100	●	18	37	40	50	100	52.5	42.5	53	TR-4.0	M12x1.0(T-6.0)	3.0
HSK-A100/GMR20/105	●	20	39	42	50	105	52.5	42.5	59	TR-5.0	M16x1.0(T-6.0)	3.0
HSK-A100/GMR25/110	●	25	53	57	63	110	61	51	62	TR-5.0	M16x1.0(T-6.0)	3.7
HSK-A100/GMR32/110	●	32	58	63	75	110	65	55	62	TR-5.0	M12x1.0(T-6.0)	3.9


Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
- »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
- »Data carrier and Coolant tube as an option.
- »All products center through coolant system.
- »Additional sizes and special designs available on request.

⚠ The minimum tool depth must be observed.

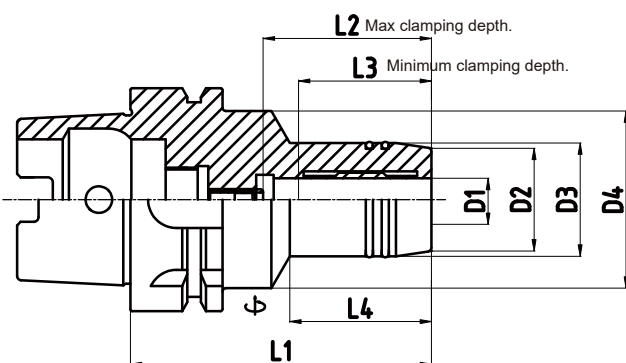

HSK-A40/A50/A63

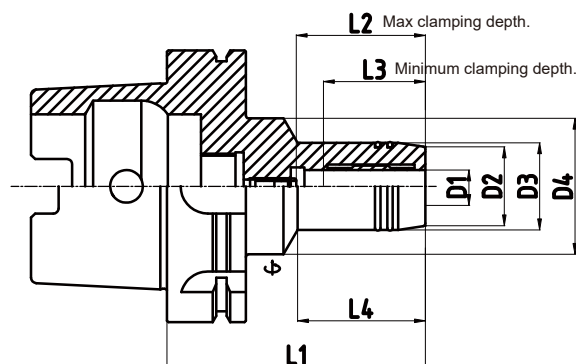

HSK-A100

HSK Long Type

Dimensions(mm)

HSK-A100		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
HSK-A100/GMR6/160	●	6	23	26	50	160	37.5	27.5	104	TR-4.0	M5x0.8(T-2.5)	3.0
HSK-A100/GMR8/160	●	8	25	28	50	160	37.5	27.5	104	TR-4.0	M6x1.0(T-3.0)	3.1
HSK-A100/GMR10/160	●	10	27	30	50	160	42.5	32.5	105	TR-4.0	M8x1.0(T-4.0)	3.1
HSK-A100/GMR12/160	●	12	29	32	50	160	47.5	37.5	105	TR-4.0	M10x1.0(T-5.0)	3.2
HSK-A100/GMR14/160	●	14	31	34	50	160	47.5	37.5	107	TR-4.0	M10x1.0(T-5.0)	3.2
HSK-A100/GMR16/160	●	16	35	38	50	160	52.5	42.5	107	TR-4.0	M12x1.0(T-6.0)	3.4
HSK-A100/GMR18/160	●	18	37	40	50	160	52.5	42.5	108	TR-4.0	M12x1.0(T-6.0)	3.5
HSK-A100/GMR20/160	●	20	39	42	50	160	52.5	42.5	108	TR-5.0	M16x1.0(T-6.0)	3.6
HSK-A100/GMR25/160	●	25	53	57	63	160	61	51	110	TR-5.0	M16x1.0(T-6.0)	4.7
HSK-A100/GMR32/160	●	32	58	63	75	160	65	55	110	TR-5.0	M16x1.0(T-6.0)	5.0

HSK-A100		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
HSK-A100/GMR6/200	●	6	23	26	50	200	37.5	27.5	144	TR-4.0	M5x0.8(T-2.5)	3.2
HSK-A100/GMR8/200	●	8	25	28	50	200	37.5	27.5	144	TR-4.0	M6x1.0(T-3.0)	3.3
HSK-A100/GMR10/200	●	10	27	30	50	200	42.5	32.5	145	TR-4.0	M8x1.0(T-4.0)	3.3
HSK-A100/GMR12/200	●	12	29	32	50	200	47.5	37.5	145	TR-4.0	M10x1.0(T-5.0)	3.4
HSK-A100/GMR14/200	●	14	31	34	50	200	47.5	37.5	147	TR-4.0	M10x1.0(T-5.0)	3.5
HSK-A100/GMR16/200	●	16	35	38	50	200	52.5	42.5	147	TR-4.0	M12x1.0(T-6.0)	3.8
HSK-A100/GMR18/200	●	18	37	40	50	200	52.5	42.5	148	TR-4.0	M12x1.0(T-6.0)	3.9
HSK-A100/GMR20/200	●	20	39	42	50	200	52.5	42.5	148	TR-5.0	M16x1.0(T-6.0)	4.0
HSK-A100/GMR25/200	●	25	53	57	63	200	61	51	150	TR-5.0	M16x1.0(T-6.0)	5.4
HSK-A100/GMR32/200	●	32	58	63	75	200	65	55	150	TR-5.0	M16x1.0(T-6.0)	6.1

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
- »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
- »Data carrier and Coolant tube as an option.
- »All products center through coolant system.
- »Additional sizes and special designs available on request.

⚠ The minimum tool depth must be observed.