

= Dimensions(mm)

HSK-A40		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
HSK-A40/GMR6/70	●	6	23	26	33.5	70	37.5	27.5	36	TR-4.0	M5x0.8(T-2.5)	0.5
HSK-A40/GMR8/70	●	8	25	28	33.5	70	37.5	27.5	36	TR-4.0	M6x1.0(T-3.0)	0.5
HSK-A40/GMR10/75	●	10	27	30	33.5	75	42.5	32.5	42	TR-4.0	M6x1.0(T-3.0)	0.6
HSK-A40/GMR12/80	●	12	29	32	33.5	80	47.5	37.5	48	TR-4.0	M6x1.0(T-3.0)	0.6

HSK-A50												
HSK-A50/GMR6/70	●	6	23	26	40	70	37.5	27.5	28	TR-4.0	M5x0.8(T-2.5)	0.7
HSK-A50/GMR8/70	●	8	25	28	40	70	37.5	27.5	28	TR-4.0	M6x1.0(T-3.0)	0.7
HSK-A50/GMR10/75	●	10	27	30	40	75	42.5	32.5	34	TR-4.0	M6x1.0(T-3.0)	0.7
HSK-A50/GMR12/85	●	12	29	32	40	85	47.5	37.5	44	TR-4.0	M6x1.0(T-3.0)	0.8
HSK-A50/GMR14/85	●	14	31	34	40	85	47.5	37.5	44	TR-4.0	M6x1.0(T-3.0)	0.8
HSK-A50/GMR16/90	●	16	35	38	41.5	90	52.5	42.5	49	TR-4.0	M6x1.0(T-3.0)	0.9
HSK-A50/GMR18/90	●	18	37	40	41.5	90	52.5	42.5	49	TR-4.0	M6x1.0(T-3.0)	0.9
HSK-A50/GMR20/90	●	20	39	41.5	41.5	90	52.5	42.5	64	TR-4.0	M6x1.0(T-3.0)	1.0

HSK-A63												
HSK-A63/GMR6/70	●	6	23	26	50	70	37.5	27.5	24	TR-4.0	M5x0.8(T-2.5)	1.0
HSK-A63/GMR8/70	●	8	25	28	50	70	37.5	27.5	24	TR-4.0	M6x1.0(T-3.0)	1.0
HSK-A63/GMR10/80	●	10	27	30	50	80	42.5	32.5	35	TR-4.0	M8x1.0(T-4.0)	1.1
HSK-A63/GMR12/85	●	12	29	32	50	85	47.5	37.5	40	TR-4.0	M8x1.0(T-4.0)	1.2
HSK-A63/GMR14/85	●	14	31	34	50	85	47.5	37.5	40	TR-4.0	M8x1.0(T-4.0)	1.2
HSK-A63/GMR16/90	●	16	35	38	50	90	52.5	42.5	46	TR-4.0	M8x1.0(T-4.0)	1.3
HSK-A63/GMR18/90	●	18	37	40	50	90	52.5	42.5	47	TR-4.0	M8x1.0(T-4.0)	1.3
HSK-A63/GMR20/90	●	20	39	42	50	90	52.5	42.5	48	TR-4.0	M8x1.0(T-4.0)	1.3
HSK-A63/GMR25/120	●	25	46	50	-	120	61	51	-	TR-5.0	M16x1.0(T-6.0)	2.3
HSK-A63/GMR32/125	●	32	56	60	52.5	125	65	55	-	TR-5.0	M16x1.0(T-6.0)	2.8

Availability: ● Stock ▲ Short lead time ○ Made to order


HSK Long Type

Dimensions(mm)

HSK-A63		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
HSK-A63/GMR6/150	●	6	23	26	50	150	37.5	27.5	103	TR-4.0	M5x0.8(T-2.5)	1.4
HSK-A63/GMR8/150	●	8	25	28	50	150	37.5	27.5	104	TR-4.0	M6x1.0(T-3.0)	1.5
HSK-A63/GMR10/150	●	10	27	30	50	150	42.5	32.5	104	TR-4.0	M8x1.0(T-4.0)	1.6
HSK-A63/GMR12/150	●	12	29	32	50	150	47.5	37.5	105	TR-4.0	M10x1.0(T-5.0)	1.7
HSK-A63/GMR14/150	●	14	31	34	50	150	47.5	37.5	105	TR-4.0	M10x1.0(T-5.0)	1.7
HSK-A63/GMR16/150	●	16	35	38	50	150	52.5	42.5	106	TR-4.0	M12x1.0(T-6.0)	1.8
HSK-A63/GMR18/150	●	18	37	40	50	150	52.5	42.5	107	TR-4.0	M12x1.0(T-6.0)	1.9
HSK-A63/GMR20/150	●	20	39	42	50	150	52.5	42.5	108	TR-5.0	M16x1.0(T-6.0)	2.0

HSK-A63												
HSK-A63/GMR6/200	●	6	23	26	50	200	37.5	27.5	153	TR-4.0	M5x0.8(T-2.5)	2.3
HSK-A63/GMR8/200	●	8	25	28	50	200	37.5	27.5	154	TR-4.0	M6x1.0(T-3.0)	2.3
HSK-A63/GMR10/200	●	10	27	30	50	200	42.5	32.5	154	TR-4.0	M8x1.0(T-4.0)	2.4
HSK-A63/GMR12/200	●	12	29	32	50	200	47.5	37.5	155	TR-4.0	M10x1.0(T-5.0)	2.4
HSK-A63/GMR14/200	●	14	31	34	50	200	47.5	37.5	155	TR-4.0	M10x1.0(T-5.0)	2.4
HSK-A63/GMR16/200	●	16	35	38	50	200	52.5	42.5	156	TR-4.0	M12x1.0(T-6.0)	2.4
HSK-A63/GMR18/200	●	18	37	40	50	200	52.5	42.5	157	TR-4.0	M12x1.0(T-6.0)	2.5
HSK-A63/GMR20/200	●	20	39	42	50	200	52.5	42.5	158	TR-5.0	M16x1.0(T-6.0)	2.6

Availability: ● Stock ▲ Short lead time ○ Made to order

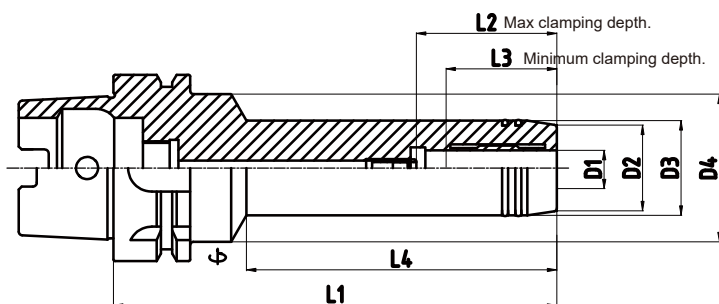

HSK-A63/A100

Inch size


≡Dimensions(mm)

HSK-A63		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
HSK-A63/GMR050/0315	●	12.7	32	42	52.5	80	46	36	34	TR-4.0	M8x1.0(T-4.0)	1.3
HSK-A63/GMR075/0315	●	19.05	38	52.5	-	80	51	41	54	TR-5.0	M8x1.0(T-4.0)	1.4

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
- »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
- »Data carrier and Coolant tube as an option.
- »All products center through coolant system.
- »Additional sizes and special designs available on request.

⚠ The minimum tool depth must be observed.

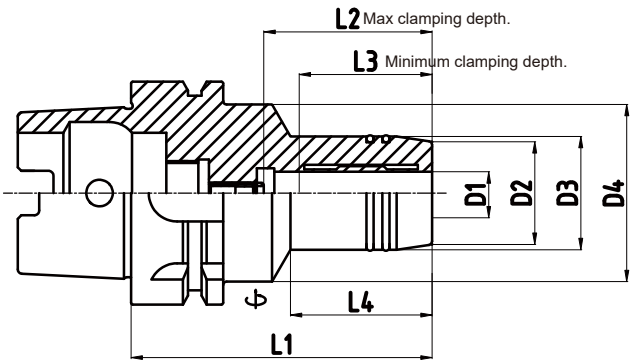

HSK-A63