

Dimensions(mm)


HSK-C40		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
HSK-C40/GMR6/60	○	6	23	26	40	60	37.5	27.5	35	TR-4.0	M5x0.8(T-2.5)	0.4
HSK-C40/GMR8/60	○	8	25	28	40	60	37.5	27.5	36	TR-4.0	M6x1.0(T-3.0)	0.4
HSK-C40/GMR10/65	○	10	27	30	40	65	42.5	32.5	41	TR-4.0	M6x1.0(T-3.0)	0.5
HSK-C40/GMR12/70	●	12	29	32	40	70	47.5	37.5	47	TR-4.0	M6x1.0(T-3.0)	0.5

HSK-C50		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
HSK-C50/GMR6/60	○	6	23	26	50	60	37.5	27.5	30	TR-4.0	M5x0.8(T-2.5)	0.7
HSK-C50/GMR8/60	○	8	25	28	50	60	37.5	27.5	30	TR-4.0	M6x1.0(T-3.0)	0.7
HSK-C50/GMR10/65	○	10	27	30	50	65	42.5	32.5	35	TR-4.0	M8x1.0(T-4.0)	0.7
HSK-C50/GMR12/75	●	12	29	32	50	75	47.5	37.5	44	TR-4.0	M10x1.0(T-5.0)	0.8
HSK-C50/GMR14/75	○	14	31	34	50	75	47.5	37.5	46	TR-4.0	M10x1.0(T-5.0)	0.8
HSK-C50/GMR16/80	○	16	35	38	50	80	52.5	42.5	51	TR-4.0	M12x1.0(T-6.0)	0.9
HSK-C50/GMR18/80	○	18	37	40	50	80	52.5	42.5	51	TR-4.0	M12x1.0(T-6.0)	1.0
HSK-C50/GMR20/80	●	20	39	42	50	80	52.5	42.5	52	TR-4.0	M12x1.0(T-6.0)	1.2

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
- »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
- »Coolant tube as an option.
- »All products center through coolant system.
- »Additional sizes and special designs available on request.

⚠ The minimum tool depth must be observed.

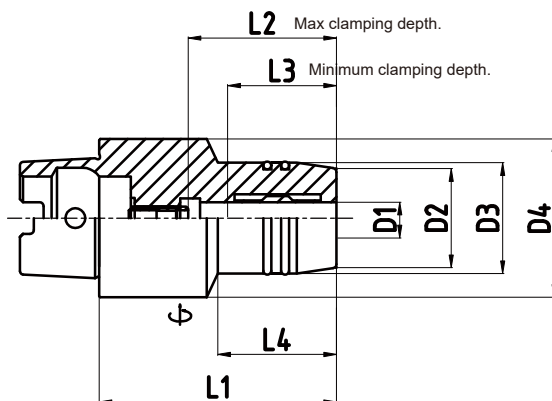

HSK-C40/C50