


= Dimensions(mm)


SK50		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
SK50/GMR12/90	●	12	29	32	50	90	47.5	37.5	47	TR-4.0	M6x1.0(T-3.0)	3.4
SK50/GMR12/140	●	12	29	32	50	140	47.5	37.5	47	TR-4.0	M6x1.0(T-3.0)	4.1
SK50/GMR20/90	●	20	39	42	50	90	52.5	42.5	48	TR-5.0	M16x1.0(T-6.0)	3.5
SK50/GMR20/140	●	20	39	42	50	140	52.5	42.5	48	TR-5.0	M16x1.0(T-6.0)	4.2
SK50/GMR32/115	●	32	58	63	-	115	65	55	-	TR-5.0	M16x1.0(T-6.0)	4.9
SK50/GMR32/140	●	32	58	63	-	140	65	55	-	TR-5.0	M16x1.0(T-6.0)	5.5

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
- »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
- »All products center through coolant system.
- »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

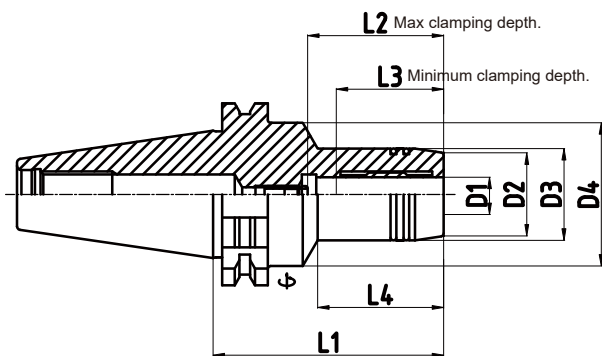

SK40

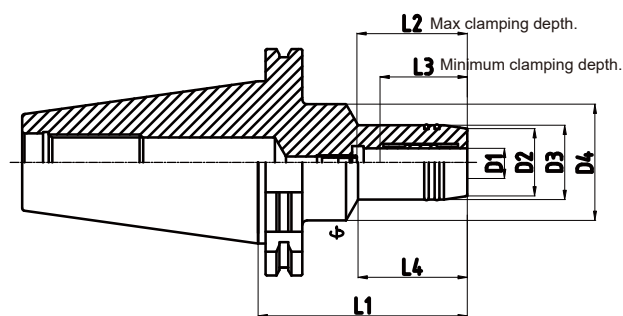

SK50