


**≡ Dimensions(mm)**

| HSK-A63           |   | D1 | D2 | D3 | D4 | L1  | L2   | L3   | L4 | Clamping wrench | Radial Adjustment (wrench) | Kg. |
|-------------------|---|----|----|----|----|-----|------|------|----|-----------------|----------------------------|-----|
| HSK-A63/GPS6/80   | ● | 6  | 23 | 26 | 50 | 80  | 37.5 | 27.5 | 33 | TR-4.0          | T-2.0                      | 1.2 |
| HSK-A63/GPS8/80   | ● | 8  | 25 | 28 | 50 | 80  | 37.5 | 27.5 | 33 | TR-4.0          | T-2.0                      | 1.2 |
| HSK-A63/GPS10/85  | ● | 10 | 27 | 30 | 50 | 85  | 42.5 | 32.5 | 38 | TR-4.0          | T-2.0                      | 1.3 |
| HSK-A63/GPS12/90  | ● | 12 | 29 | 32 | 50 | 90  | 47.5 | 37.5 | 40 | TR-4.0          | T-2.0                      | 1.4 |
| HSK-A63/GPS14/90  | ● | 14 | 31 | 34 | 50 | 90  | 47.5 | 37.5 | 46 | TR-4.0          | T-3.0                      | 1.4 |
| HSK-A63/GPS16/95  | ● | 16 | 35 | 38 | 50 | 95  | 52.5 | 42.5 | 51 | TR-4.0          | T-3.0                      | 1.5 |
| HSK-A63/GPS18/95  | ● | 18 | 37 | 40 | 50 | 95  | 52.5 | 42.5 | 52 | TR-4.0          | T-3.0                      | 1.6 |
| HSK-A63/GPS20/100 | ● | 20 | 39 | 42 | 50 | 100 | 52.5 | 42.5 | 53 | TR-4.0          | T-3.0                      | 1.7 |
| HSK-A63/GPS25/120 | ● | 25 | 46 | 50 | -  | 120 | 61   | 51   | 94 | TR-5.0          | T-3.0                      | 2.4 |
| HSK-A63/GPS32/125 | ● | 32 | 56 | 60 | -  | 125 | 65   | 55   | 99 | TR-5.0          | T-3.0                      | 3.0 |

**Availability:** ● Stock ▲ Short lead time ○ On request

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
- »T-wrench is must be ordered separately.  
(GRIP torque wrench is recommended.)
- »Data carrier and Coolant tube as an option.
- »All products center through coolant system.
- »Additional sizes and special designs available on request.

⚠ The minimum tool depth must be observed.

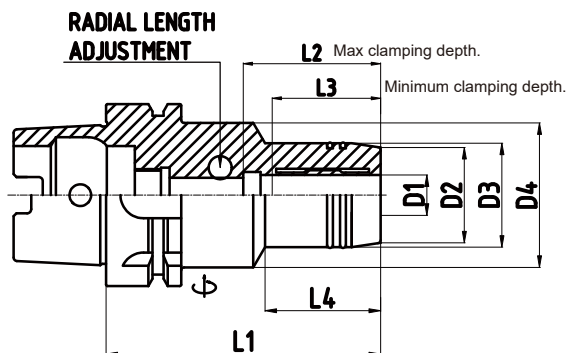

HSK-A63