




SLIM

≡Dimensions(mm)

BT30		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
BT30/GSL6/110	●	6	16	24	44.5	110	37.5	27.5	66	TR-4.0	M5x0.8(T-2.5)	0.9
BT30/GSL8/110	●	8	18	26	44.5	110	37.5	27.5	66	TR-4.0	M6x1.0(T-3.0)	0.9
BT30/GSL10/110	●	10	20	28	44.5	110	42.5	32.5	67	TR-4.0	M8x1.0(T-4.0)	1.1
BT30/GSL12/110	●	12	22	30	44.5	110	47.5	37.5	67	TR-4.0	M10x1.0(T-5.0)	1.2

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
 - »Tool length can be adjusted up to 10mm.
 - »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
 - »All products center through coolant system.
 - »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

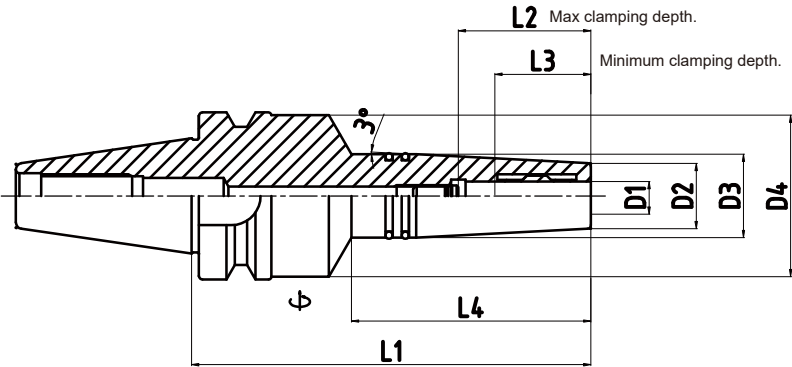

BT30