


Dimensions(mm)

BT40		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
BT40/GSL6/150	●	6	16	24	50	150	37.5	27.5	103	TR-4.0	M5x0.8(T-2.5)	1.6
BT40/GSL8/150	●	8	18	26	50	150	37.5	27.5	104	TR-4.0	M6x1.0(T-3.0)	1.7
BT40/GSL10/150	●	10	20	28	50	150	42.5	32.5	104	TR-4.0	M8x1.0(T-4.0)	1.7
BT40/GSL12/150	●	12	22	30	50	150	47.5	37.5	105	TR-4.0	M10x1.0(T-5.0)	1.8
BT40/GSL14/150	●	14	24	32	50	150	47.5	37.5	105	TR-4.0	M10x1.0(T-5.0)	1.8
BT40/GSL16/150	●	16	26	34	50	150	52.5	42.5	106	TR-4.0	M12x1.0(T-6.0)	1.9
BT40/GSL18/150	●	18	28	36	50	150	52.5	42.5	107	TR-4.0	M12x1.0(T-6.0)	1.9
BT40/GSL20/150	●	20	30	38	50	150	52.5	42.5	108	TR-4.0	M16x1.0(T-6.0)	2.0

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
- »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
- »All products center through coolant system.
- »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

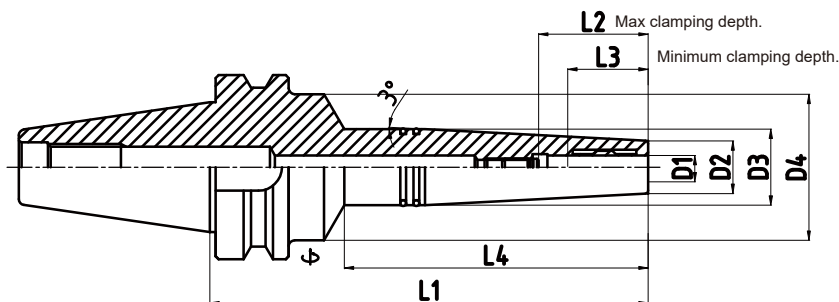

BT40