




SLIM

≡ Dimensions(mm)

BT50		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
BT50/GSL6/190	○	6	16	24	50	190	37.5	27.5	120	TR-4.0	M5x0.8(T-2.5)	4.3
BT50/GSL8/190	○	8	18	26	50	190	37.5	27.5	120	TR-4.0	M6x1.0(T-3.0)	4.3
BT50/GSL10/190	○	10	20	28	50	190	42.5	32.5	120	TR-4.0	M8x1.0(T-4.0)	4.4
BT50/GSL12/190	○	12	22	30	50	190	47.5	37.5	120	TR-4.0	M10x1.0(T-5.0)	4.4
BT50/GSL14/190	○	14	24	32	50	190	47.5	37.5	121	TR-4.0	M10x1.0(T-5.0)	4.5
BT50/GSL16/190	○	16	26	34	50	190	52.5	42.5	121	TR-4.0	M12x1.0(T-6.0)	4.5
BT50/GSL18/190	○	18	28	36	50	190	52.5	42.5	122	TR-4.0	M12x1.0(T-6.0)	4.6
BT50/GSL20/190	○	20	30	38	50	190	52.5	42.5	122	TR-4.0	M16x1.0(T-6.0)	4.7

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
- »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
- »All products center through coolant system.
- »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

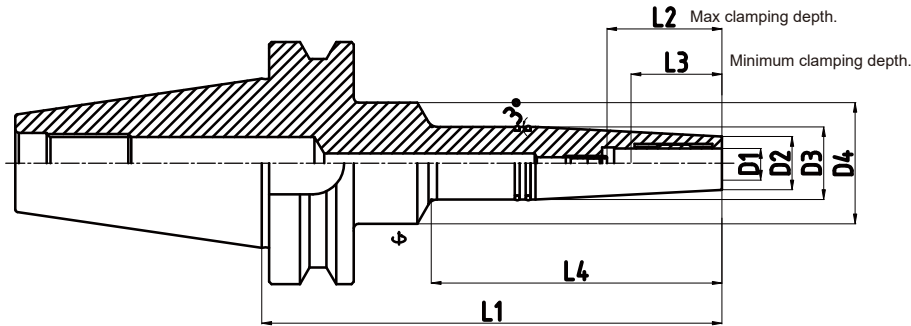

BT50