


= Dimensions(mm)

HSK-A50		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
HSK-A50/GSL6/110	▲	6	16	24	41.5	110	37.5	27.5	66	TR-4.0	M5x0.8(T-2.5)	0.7
HSK-A50/GSL8/110	▲	8	18	26	41.5	110	37.5	27.5	66	TR-4.0	M6x1.0(T-3.0)	0.7
HSK-A50/GSL10/110	▲	10	20	28	41.5	110	42.5	32.5	67	TR-4.0	M8x1.0(T-4.0)	0.8
HSK-A50/GSL12/110	▲	12	22	30	41.5	110	47.5	37.5	67	TR-4.0	M10x1.0(T-5.0)	0.9

HSK-A63		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
HSK-A63/GSL6/150	●	6	16	24	50	150	37.5	27.5	103	TR-4.0	M5x0.8(T-2.5)	1.3
HSK-A63/GSL8/150	●	8	18	26	50	150	37.5	27.5	104	TR-4.0	M6x1.0(T-3.0)	1.3
HSK-A63/GSL10/150	●	10	20	28	50	150	42.5	32.5	104	TR-4.0	M8x1.0(T-4.0)	1.4
HSK-A63/GSL12/150	●	12	22	30	50	150	47.5	37.5	105	TR-4.0	M10x1.0(T-5.0)	1.5
HSK-A63/GSL14/150	●	14	24	32	50	150	47.5	37.5	105	TR-4.0	M10x1.0(T-5.0)	1.5
HSK-A63/GSL16/150	●	16	26	34	50	150	52.5	42.5	106	TR-4.0	M12x1.0(T-6.0)	1.6
HSK-A63/GSL18/150	●	18	28	36	50	150	52.5	42.5	107	TR-4.0	M12x1.0(T-6.0)	1.6
HSK-A63/GSL20/150	●	20	30	38	50	150	52.5	42.5	108	TR-4.0	M16x1.0(T-6.0)	1.7

Availability: ● Stock ▲ Short lead time ○ Made to order

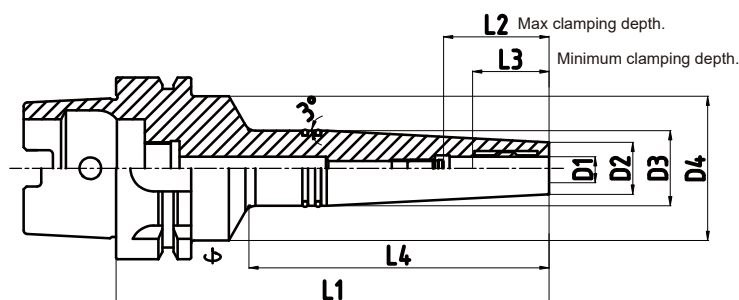

HSK-A50/A63