


**Dimensions(mm)**

| HSK-E50           |   | D1 | D2 | D3 | D4   | L1  | L2   | L3   | L4 | Clamping wrench | Adjustment bolt (wrench) | Kg. |
|-------------------|---|----|----|----|------|-----|------|------|----|-----------------|--------------------------|-----|
| HSK-E50/GSL6/110  | ○ | 6  | 16 | 24 | 41.5 | 110 | 37.5 | 27.5 | 66 | TR-4.0          | M5x0.8(T-2.5)            | 0.7 |
| HSK-E50/GSL8/110  | ○ | 8  | 18 | 26 | 41.5 | 110 | 37.5 | 27.5 | 66 | TR-4.0          | M6x1.0(T-3.0)            | 0.8 |
| HSK-E50/GSL10/110 | ○ | 10 | 20 | 28 | 41.5 | 110 | 42.5 | 32.5 | 67 | TR-4.0          | M8x1.0(T-4.0)            | 0.8 |
| HSK-E50/GSL12/110 | ○ | 12 | 22 | 30 | 41.5 | 110 | 47.5 | 37.5 | 67 | TR-4.0          | M10x1.0(T-5.0)           | 0.9 |

**Availability:** ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
- »T-wrench is must be ordered separately.  
(GRIP torque wrench is recommended.)
- »Data carrier and Coolant tube as an option.
- »All products center through coolant system.
- »Additional sizes and special designs available on request.

⚠ The minimum tool depth must be observed.

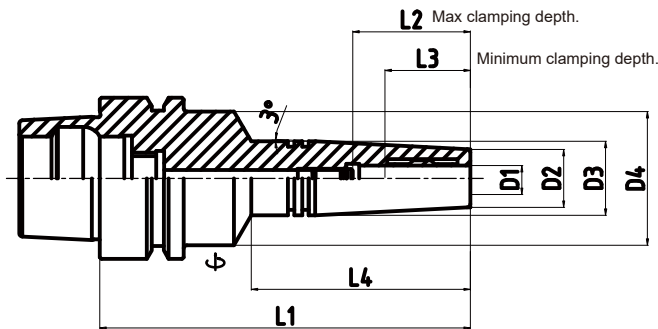

HSK-E50