


**Dimensions(mm)**

| SK40           |   | D1 | D2 | D3 | D4 | L1  | L2   | L3   | L4  | Clamping wrench | Adjustment bolt (wrench) | Kg. |
|----------------|---|----|----|----|----|-----|------|------|-----|-----------------|--------------------------|-----|
| SK40/GSL6/150  | ● | 6  | 16 | 24 | 50 | 150 | 37.5 | 27.5 | 103 | TR-4.0          | M5x0.8(T-2.5)            | 1.6 |
| SK40/GSL8/150  | ● | 8  | 18 | 26 | 50 | 150 | 37.5 | 27.5 | 104 | TR-4.0          | M6x1.0(T-3.0)            | 1.7 |
| SK40/GSL10/150 | ● | 10 | 20 | 28 | 50 | 150 | 42.5 | 32.5 | 104 | TR-4.0          | M8x1.0(T-4.0)            | 1.7 |
| SK40/GSL12/150 | ● | 12 | 22 | 30 | 50 | 150 | 47.5 | 37.5 | 105 | TR-4.0          | M10x1.0(T-5.0)           | 1.8 |
| SK40/GSL14/150 | ● | 14 | 24 | 32 | 50 | 150 | 47.5 | 37.5 | 105 | TR-4.0          | M10x1.0(T-5.0)           | 1.8 |
| SK40/GSL16/150 | ● | 16 | 26 | 34 | 50 | 150 | 52.5 | 42.5 | 106 | TR-4.0          | M12x1.0(T-6.0)           | 1.9 |
| SK40/GSL18/150 | ● | 18 | 28 | 36 | 50 | 150 | 52.5 | 42.5 | 107 | TR-4.0          | M12x1.0(T-6.0)           | 1.9 |
| SK40/GSL20/150 | ● | 20 | 30 | 38 | 50 | 150 | 52.5 | 42.5 | 108 | TR-4.0          | M16x1.0(T-6.0)           | 2.0 |

**Availability:** ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
- »T-wrench is must be ordered separately.  
(GRIP torque wrench is recommended.)
- »All products center through coolant system.
- »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

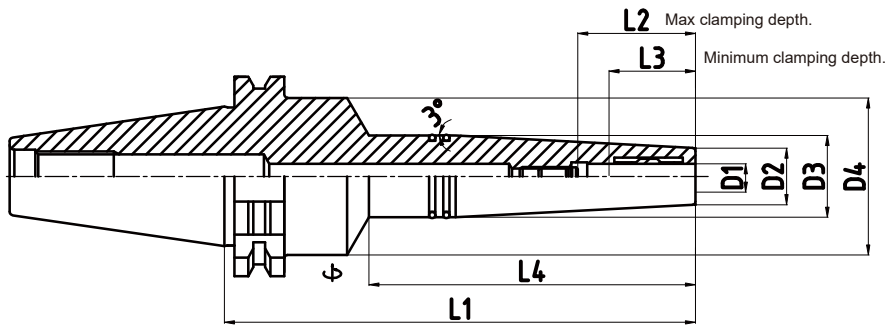

SK40



SLIM