

Front Type




Dimensions(mm)

ST16	D1	D2	D3	L1	L2	L3	L4	L5	Shape	Wrench	Type of machine
ST16-GST3-90	3	16	-	90	17.5	24	40	-		TR-3.0	SR-10J
ST16-GST3.175-90	3.175	16	-	90	17.5	24	40	-		TR-3.0	
ST16-GST4-90	4	16	-	90	21	26	40	-		TR-3.0	
ST16-GST6-90	6	16	-	90	23	29	37	-		TR-3.0	

ST22	D1	D2	D3	L1	L2	L3	L4	L5	Shape	Wrench	Type of machine
ST22-GST3-110	3	22	-	110	17.5	24	40	-		TR-4.0	12 / 20 SERIES
ST22-GST4-110	4	22	-	110	21	26	40	-		TR-4.0	
ST22-GST6-110	6	22	-	110	23	29	52	-		TR-4.0	
ST22-GST8-110	8	22	-	110	28	34	52	-		TR-4.0	
ST22-GST10-110	10	22	-	110	29.5	36	55	-		TR-4.0	

ST32	D1	D2	D3	L1	L2	L3	L4	L5	Shape	Wrench	Type of machine
ST32-GST3-110	3	32	-	110	17.5	24	40	-		TR-4.0	32 SERIES
ST32-GST4-110	4	32	-	110	21	26	40	-		TR-4.0	
ST32-GST6-110	6	32	-	110	23	29	52	-		TR-4.0	
ST32-GST8-110	8	32	-	110	28	34	52	-		TR-4.0	
ST32-GST10-110	10	32	-	110	29.5	36	55	-		TR-4.0	
ST32-GST12-110	12	32	-	110	31.5	38	58	-		TR-4.0	

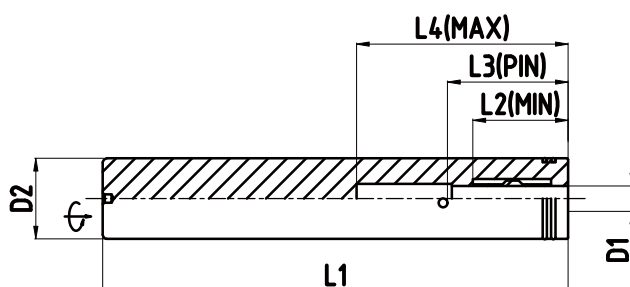

ST16/ ST22/ ST32

Back Type



Dimensions(mm)

ST22	D1	D2	D3	L1	L2	L3	L4	L5	L6	Wrench	Type of machine
ST22-GST4-25/66A	4	22	19	66	21	25	56	14	25	TR-4.0	12/ 20 SERIES
ST22-GST6-25/66A	6	22	20	66	23	30	47	14	25	TR-4.0	
ST22-GST8-25/66A	8	22	23	66	28	34	51	15	25	TR-4.0	
ST22-GST10-25/66A	10	22	27	66	29.5	36	52	16	25	TR-4.0	
ST22-GST12-25/66A	12	22	29	66	31.5	42	56	17.25	25	TR-4.0	

ST22	D1	D2	D3	L1	L2	L3	L4	L5	L6	Wrench	Type of machine
ST22-GST4-25/66B	4	22	19	66	21	25	56	16.25	25	TR-4.0	SW20/ SR20IV
ST22-GST6-25/66B	6	22	20	66	23	30	47	16.25	25	TR-4.0	
ST22-GST8-25/66B	8	22	23	66	28	34	51	16.25	25	TR-4.0	
ST22-GST10-25/66B	10	22	27	66	29.5	36	52	16.25	25	TR-4.0	
ST22-GST12-25/66B	12	22	29	66	31.5	42	52	17.25	25	TR-4.0	


»h6 shank tools must be used.

»T-wrench is must be ordered separately.



»The inner diameter 8 and 12 can be used with various tools by using the hydro-sleeve.

»All products center through coolant system.(All item Coolant M6x1.0)


»Additional sizes and special designs available on request.

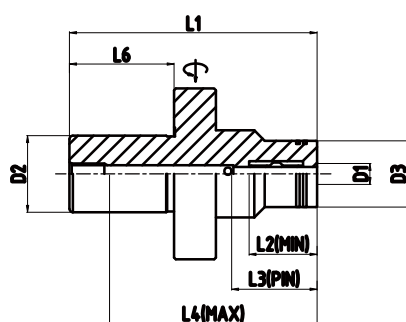

ST22-A

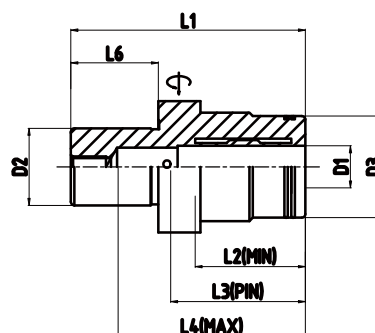

ST22-B



SWISS TURN

Front Type

TORNOS

= Dimensions(mm)

ST16	D1	D2	D3	L1	L2	L3	L4	L5	Shape	Wrench	Type of machine
ST16-GST3-50	3	16	-	50	17.5	24	28	-		TR-3.0	MICRO 7/8
ST16-GST3.175-50	3.175	16	-	50	17.5	24	28	-		TR-3.0	
ST16-GST4-50	4	16	-	50	21	26	28	-		TR-3.0	
ST16-GST3-90	3	16	-	90	17.5	24	40	-		TR-3.0	SWISS NANO SERIES
ST16-GST3.175-90	3.175	16	-	90	17.5	24	40	-		TR-3.0	
ST16-GST4-90	4	16	-	90	21	26	40	-		TR-3.0	
ST16-GST6-90	6	16	-	90	23	29	37	-		TR-3.0	

ST20	D1	D2	D3	L1	L2	L3	L4	L5	Shape	Wrench	Type of machine
ST20-GST3-110	3	20	-	110	17.5	24	40	-		TR-3.0	GAMMA20
ST20-GST4-110	4	20	-	110	21	26	40	-		TR-3.0	
ST20-GST6-110	6	20	-	110	23	29	52	-		TR-3.0	
ST20-GST8-110	8	20	-	110	28	34	52	-		TR-3.0	

ST22	D1	D2	D3	L1	L2	L3	L4	L5	Shape	Wrench	Type of machine
ST22-GST3-110	3	22	-	110	17.5	24	40	-		TR-4.0	DELTA 20 GAMMA 20
ST22-GST4-110	4	22	-	110	21	26	40	-		TR-4.0	
ST22-GST6-110	6	22	-	110	23	29	52	-		TR-4.0	
ST22-GST8-110	8	22	-	110	28	34	52	-		TR-4.0	
ST22-GST10-110	10	22	-	110	29.5	36	55	-		TR-4.0	

ST25	D1	D2	D3	L1	L2	L3	L4	L5	Shape	Wrench	Type of machine
ST25-GST3-110	3	25	-	110	17.5	24	40	-		TR-4.0	DECO (7/10/13/20)
ST25-GST4-110	4	25	-	110	21	26	40	-		TR-4.0	
ST25-GST6-110	6	25	-	110	23	29	52	-		TR-4.0	
ST25-GST8-110	8	25	-	110	28	34	52	-		TR-4.0	
ST25-GST10-110	10	25	-	110	29.5	36	55	-		TR-4.0	
ST25-GST12-110	12	25	-	110	31.5	38	58	-		TR-4.0	


Front Type



Dimensions(mm)

ST22	D1	D2	D3	L1	L2	L3	L4	L5	Shape	Wrench	Type of machine
ST22-GST3-110	3	22	-	110	17.5	24	40	-		TR-4.0	NN-20 SERIES
ST22-GST4-110	4	22	-	110	21	26	40	-		TR-4.0	
ST22-GST6-110	6	22	-	110	23	29	52	-		TR-4.0	
ST22-GST8-110	8	22	-	110	28	34	52	-		TR-4.0	
ST22-GST10-110	10	22	-	110	29.5	36	55	-		TR-4.0	

ST32	D1	D2	D3	L1	L2	L3	L4	L5	Shape	Wrench	Type of machine
ST32-GST3-110	3	32	-	110	17.5	24	40	-		TR-4.0	NN-32 SERIES
ST32-GST4-110	4	32	-	110	21	26	40	-		TR-4.0	
ST32-GST6-110	6	32	-	110	23	29	52	-		TR-4.0	
ST32-GST8-110	8	32	-	110	28	34	52	-		TR-4.0	
ST32-GST10-110	10	32	-	110	29.5	36	55	-		TR-4.0	
ST32-GST12-110	12	32	-	110	31.5	38	58	-		TR-4.0	

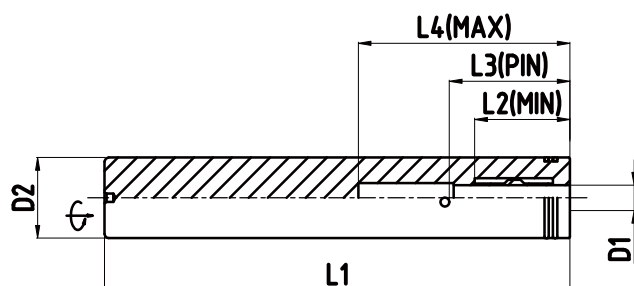

ST22/ ST32

Back Type



≡ Dimensions(mm)

ST22	D1	D2	D3	L1	L2	L3	L4	L5	L6	Wrench	Type of machine
ST22-GST4-25/66B	4	22	19	66	21	25	56	16.25	25	TR-4.0	For common use
ST22-GST6-25/66B	6	22	20	66	23	30	47	16.25	25	TR-4.0	
ST22-GST8-25/66B	8	22	23	66	28	34	51	16.25	25	TR-4.0	
ST22-GST10-25/66B	10	22	27	66	29.5	36	52	16.25	25	TR-4.0	
ST22-GST12-25/66B	12	22	29	66	31.5	42	52	17.25	25	TR-4.0	

- »h6 shank tools must be used.
- »T-wrench is must be ordered separately.
- »The inner diameter 8 and 12 can be used with various tools by using the hydro-sleeve.
- »All products center through coolant system.(All item Coolant M6x1.0)
- »Additional sizes and special designs available on request.

