

Dimensions(mm)

BT40		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
BT40/GVS20/40	●	20	50	-	-	40	51.5	41.5	13	TR-4.0	-	1.1

BT50		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
BT50/GVS32/51	●	32	70.5	-	-	51	65	55	13	TR-5.0	-	3.8


SK40		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
SK40/GVS20/32	●	20	50	-	-	32	47.5	37.5	12.9	TR-4.0	-	0.9

SK50		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
SK50/GVS32/32	●	32	70.5	-	-	32	65	55	12.9	TR-5.0	-	2.9


Availability: ● Stock ▲ Short lead time ○ Made to order

»h6 shank tools must be used.
»Tool length can be adjusted up to 10mm.
»T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
»All products center through coolant system.
»Additional sizes and special designs available on request.

⚠ The minimum tool depth must be observed.

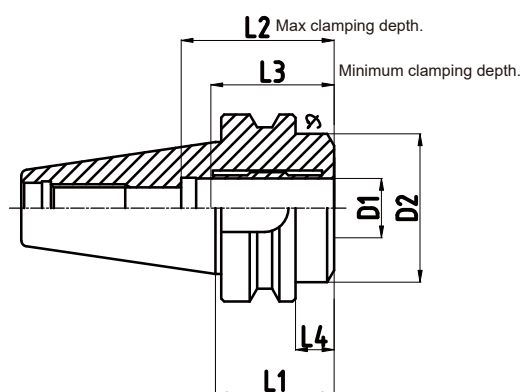

BT40/BT50

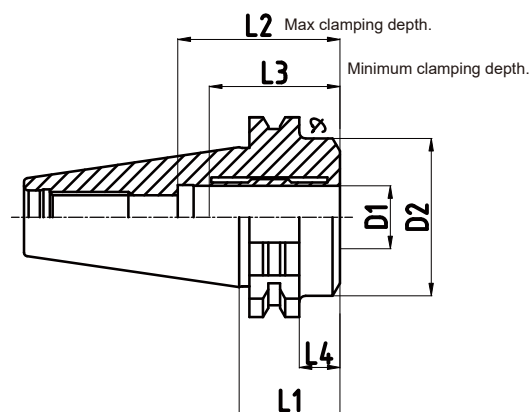

SK40/SK50