


Dimensions(mm)

ST20		D1	D2	D3	D4	D5	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
ST20/ZEX6/165	●	6	16	24	42	20	165	41	31	101	TR-4.0	M5x0.8(T-2.5)	0.5
ST20/ZEX8/165	●	8	18	26	42	20	165	41	31	101	TR-4.0	M6x1.0(T-3.0)	0.5
ST20/ZEX10/165	●	10	20	28	42	20	165	48	38	101	TR-4.0	M8x1.0(T-4.0)	0.6
ST20/ZEX12/165	●	12	22	30	42	20	165	53	43	101	TR-4.0	M10x1.0(T-5.0)	0.7
ST20/ZEX16/165	●	16	26	28	42	20	165	58	48	101	TR-4.0	M12x1.0(T-6.0)	0.8
ST20/ZEX20/165	●	20	29	31.5	42	20	165	58	48	101	TR-5.0	M16x1.0(T-6.0)	0.8
ST20/ZEX20/215	●	20	29	31.5	42	20	215	58	48	151	TR-5.0	M16x1.0(T-6.0)	1.2

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
 - »Tool length can be adjusted up to 10mm.
 - »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
 - »If you use the ZERO-FIT function, you cannot use the hydro-sleeve.
 - »All products center through coolant system.
 - »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

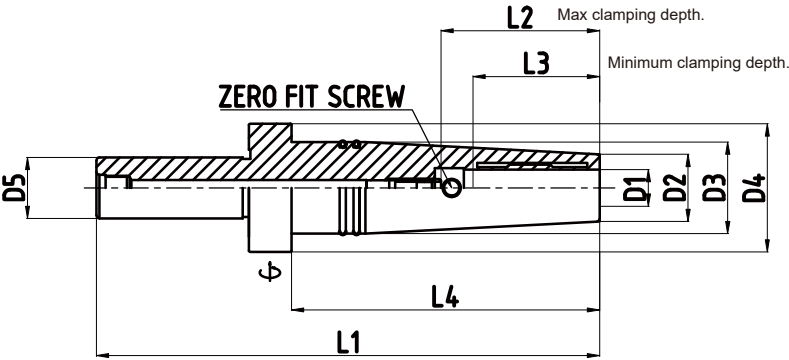

ST20

**ZERO
EXTENSION**