


Dimensions(mm)

BT30		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
BT30/GZF6/90	●	6	23	26	44.5	90	41	31	48	TR-4.0	M5x0.8(T-2.5)	0.8
BT30/GZF8/90	●	8	25	28	44.5	90	41	31	48	TR-4.0	M6x1.0(T-3.0)	0.8
BT30/GZF10/90	●	10	27	30	44.5	90	48	38	51	TR-4.0	M8x1.0(T-4.0)	0.8
BT30/GZF12/95	●	12	29	32	44.5	95	53	43	56	TR-4.0	M10x1.0(T-5.0)	0.9
BT30/GZF16/100	●	16	35	38	44.5	100	58	48	58	TR-4.0	M12x1.0(T-6.0)	1.1
BT30/GZF20/105	●	20	39	42	44.5	105	58	48	63	TR-4.0	M12x1.0(T-6.0)	1.2

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
 - »Tool length can be adjusted up to 10mm.
(If you use the ZERO-FIT function, you cannot use the adjust screw.)
 - »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
 - »If you use the ZERO-FIT function, you cannot use the hydro-sleeve.
 - »All products center through coolant system.
 - »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

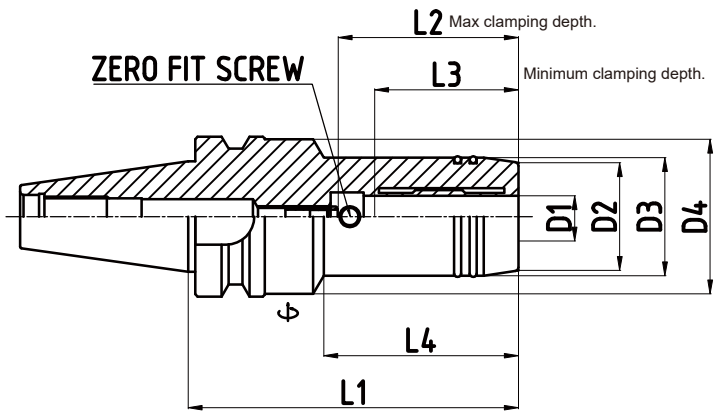

BT30