


≡ Dimensions(mm)

BT40		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
BT40/GZF6/90	●	6	23	26	50	90	41	31	44	TR-4.0	M5x0.8(T-2.5)	1.4
BT40/GZF8/90	●	8	25	28	50	90	41	31	44	TR-4.0	M6x1.0(T-3.0)	1.4
BT40/GZF10/95	●	10	27	30	50	95	48	38	49	TR-4.0	M8x1.0(T-4.0)	1.5
BT40/GZF12/100	●	12	29	32	50	100	53	43	54	TR-4.0	M10x1.0(T-5.0)	1.6
BT40/GZF16/105	●	16	35	38	50	105	58	48	63	TR-4.0	M12x1.0(T-6.0)	1.7
BT40/GZF20/105	●	20	39	42	50	105	58	48	63	TR-5.0	M16x1.0(T-6.0)	1.8
BT40/GZF25/110	●	25	53	57	57	110	67	57	-	TR-5.0	M16x1.0(T-6.0)	2.3
BT40/GZF32/115	●	32	58	62	62	115	71	61	-	TR-5.0	M16x1.0(T-6.0)	2.6

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
 - »Tool length can be adjusted up to 10mm.
(If you use the ZERO-FIT function, you cannot use the adjust screw.)
 - »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
 - »If you use the ZERO-FIT function, you cannot use the hydro-sleeve.
 - »All products center through coolant system.
 - »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

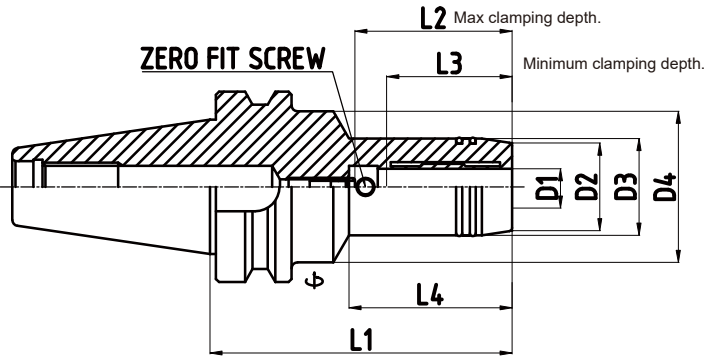

BT40

ZERO FIT