


= Dimensions(mm)

HSK-A100		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
HSK-A100/GZF6/95	○	6	23	26	50	95	41	31	46	TR-4.0	M5x0.8(T-2.5)	2.8
HSK-A100/GZF8/95	○	8	25	28	50	95	41	31	46	TR-4.0	M6x1.0(T-3.0)	2.8
HSK-A100/GZF10/100	○	10	27	30	50	100	48	38	52	TR-4.0	M8x1.0(T-4.0)	2.9
HSK-A100/GZF12/105	●	12	29	32	50	105	53	43	57	TR-4.0	M10x1.0(T-5.0)	3.0
HSK-A100/GZF16/110	○	16	35	38	50	110	58	48	63	TR-4.0	M12x1.0(T-6.0)	3.1
HSK-A100/GZF20/110	●	20	39	42	50	110	58	48	64	TR-5.0	M16x1.0(T-6.0)	3.4
HSK-A100/GZF25/120	○	25	53	57	63	120	67	57	72	TR-5.0	M16x1.0(T-6.0)	3.8
HSK-A100/GZF32/120	○	32	58	63	75	120	71	61	72	TR-5.0	M16x1.0(T-6.0)	4.2

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
(If you use the ZERO-FIT function, you cannot use the adjust screw.)
- »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
- »If you use the ZERO-FIT function, you cannot use the hydro-sleeve.
- »Data carrier and Coolant tube as an option.
- »All products center through coolant system.
- »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

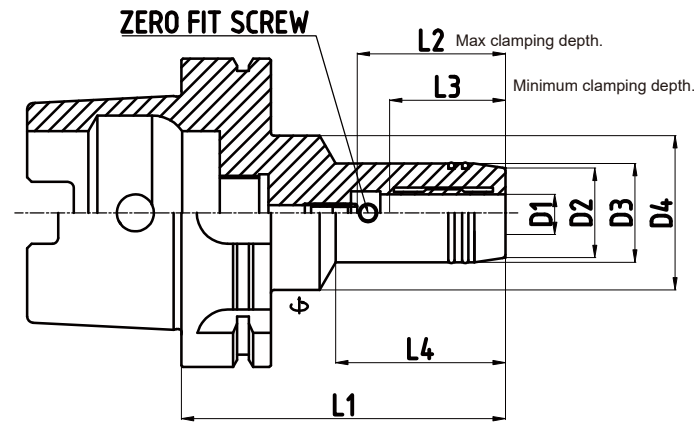

HSK100A

ZERO FIT