


Dimensions(mm)

HSK-A63		D1	D2	D3	D4	L1	L2	L3	L4	Clamping wrench	Adjustment bolt (wrench)	Kg.
HSK-A63/GZF6/90	●	6	23	26	50	90	41	31	44	TR-4.0	M5x0.8(T-2.5)	1.2
HSK-A63/GZF8/90	●	8	25	28	50	90	41	31	44	TR-4.0	M6x1.0(T-3.0)	1.2
HSK-A63/GZF10/95	●	10	27	30	50	95	48	38	50	TR-4.0	M8x1.0(T-4.0)	1.3
HSK-A63/GZF12/100	●	12	29	32	50	100	53	43	55	TR-4.0	M10x1.0(T-5.0)	1.3
HSK-A63/GZF16/105	●	16	35	38	50	105	58	48	61	TR-4.0	M12x1.0(T-6.0)	1.4
HSK-A63/GZF20/105	●	20	39	42	50	105	58	48	63	TR-5.0	M16x1.0(T-6.0)	1.5
HSK-A63/GZF25/115	●	25	46	50	-	115	66	56	89	TR-5.0	M16x1.0(T-6.0)	2.6
HSK-A63/GZF32/130	●	32	56	60	52.5	130	70	60	104	TR-5.0	M16x1.0(T-6.0)	3.2

Availability: ● Stock ▲ Short lead time ○ Made to order

- »h6 shank tools must be used.
- »Tool length can be adjusted up to 10mm.
(If you use the ZERO-FIT function, you cannot use the adjust screw.)
- »T-wrench is must be ordered separately.
(GRIP torque wrench is recommended.)
- »If you use the ZERO-FIT function, you cannot use the hydro-sleeve.
- »Data carrier and Coolant tube as an option.
- »All products center through coolant system.
- »Additional sizes and special designs available on request.
- ⚠ The minimum tool depth must be observed.

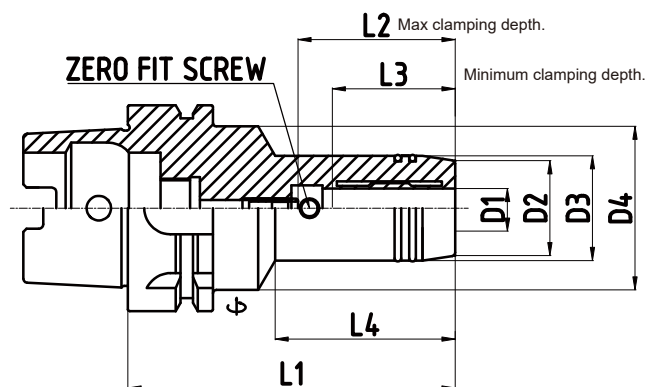

HSK63A