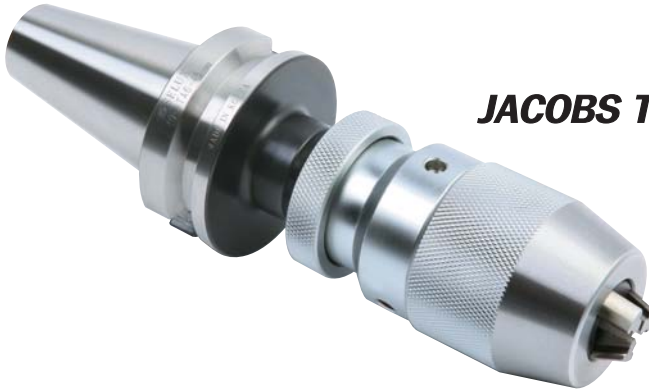
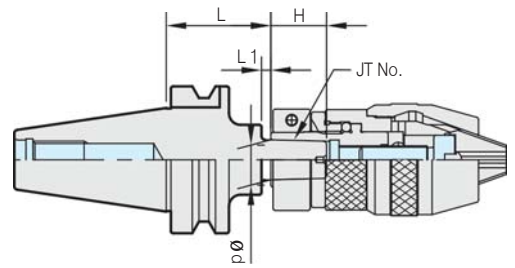


JACOBS TAPER ARBOR

CODE No.

BT50 JTA6 45

Shank
Jacobs No. Length**JACOBS TAPER 접착을 80% 이상 진동없음.****PRODUCT INFORMATION**

■ Drill chuck은 포함되어 있지 않습니다. ■ Drill chuck is not included.

Code No.	ød	JT No.	L	L1	H	Weight (kg)
BT30 - JTA2 - 30	14,199	2	30	4	20	1.0
JTA6 - 30	17,170	6			24	1.0
BT40 - JTA2 - 45	14,199	2	45	4	20	1.1
- 90			90			1.4
JTA6 - 45	17,170	6	45		24	1.1
- 90			90			1.4
BT50 - JTA2 - 45	14,199	2	45	4	20	4.0
- 105			105			4.4
JTA6 - 45	17,170	6	45		24	4.0
- 105			105			4.4

MORSE TAPER HOLDER



■ for Morse taper shank with tang.

CODE No.

BT50	MTA1	45
Shank	Morse Taper No.	Length



TAPER 접촉을 80% 이상 진동없음.

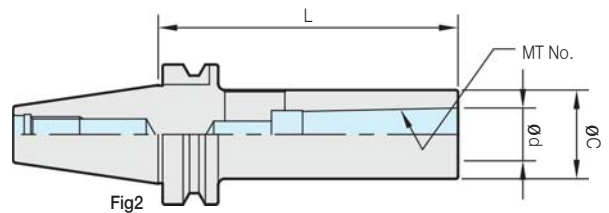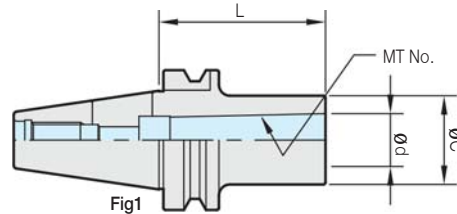

PRODUCT INFORMATION

■ Drill, reamer, 기타(MT Shank type tool)등을 사용 할 수 있습니다.

■ MORSE TAPER HOLDER can use tool holder for drill, reamer, etc.

Code No.	ød	MT No.	L	øC	Fig	Weight (kg)
BT30 - MTA1 - 45	12,065	1	45	25	1	0,5
MTA2 - 60	17,780	2	60	32		0,5
MTA3 - 80	23,825	3	80	40		0,5
BT40 - MTA1 - 45	12,065	1	45	25	1	1,0
- 120			120		2	1,3
MTA2 - 60			60		1	1,0
- 120	17,780	2	120	32	2	1,5
MTA3 - 75			75		1	1,0
- 135			135		2	1,7
MTA4 - 95	31,267	4	95	50	1	1,6
- 165			165		2	1,7
BT50 - MTA1 - 45	12,065	1	45	25	1	3,9
- 120			120		2	4,2
- 180			180			4,3
MTA2 - 45	17,780	2	45	32	1	3,9
- 135			135		2	4,3
- 180			180			4,6
MTA3 - 45	23,825	3	45	40	1	3,8
- 150			150		2	4,6
- 180			180			4,9
MTA4 - 75	31,267	4	75	50	1	3,9
- 180			180		2	5,4
MTA5 - 105	44,399	5	105	65	1	4,5
- 210			210		2	7,2

Drill Dia and Shank

Shank		MT1	MT2	MT3	MT4	MT5
Drill dia	Min	3,0	14,5	23,5	32,0	51,0
	Max	14,0	23,0	31,5	50,0	76,0

MORSE TAPER HOLDER

■ for Morse taper shank with tang.

CODE No.

BT50 MTB3 45

Shank Morse Taper No. Length

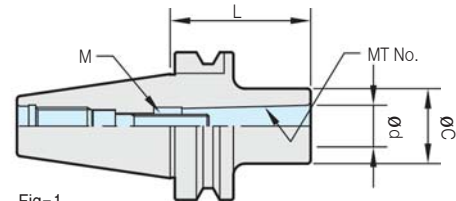


Fig-1

Draw BOLT Type

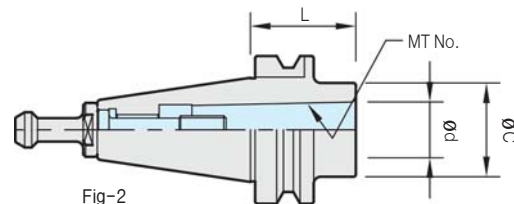


Fig-2

Pull - Stud Draw BOLT Type(별매)

PRODUCT INFORMATION

- Fig 1의 경우 Draw Bolt가 포함되어 있습니다.
- Draw-in Bolt is supplied with Fig 1 type arbor.
- Fig 2의 경우 전용 pull stud bolt가 필요합니다.
- for Fig2, it is necessary for special pull stud bolt as exclusive use.


Code No.	ød	MT No.	L	øC	M	Fig	Weight (kg)
BT30 - MTB1 - 45	12,065	1	45	25	M 6	1	0.8
MTB2 - 60	17,780	2	60	32	M10	2	0.8
MTB3 - 80	23,825	3	80	40	M12		1.0
BT40 - MTB1 - 45	12,065	1	45	25	M 6	1	1.0
MTB2 - 45	17,780	2	45	32	M10		1.1
MTB3 - 45	23,825	3	45	40	M12	2	1.1
MTB4 - 85	31,267	4	85	50	M16		1.3
BT50 - MTB1 - 45	12,065	1	45	25	M 6	1	3.9
MTB2 - 45	17,780	2	45	32	M10		3.9
MTB3 - 60	23,825	3	60	40	M12		3.9
MTB4 - 70	31,267	4	70	50	M16		3.9
MTB5 - 105	44,399	5	105	65	M20	2	4.0

SPECIAL PULL STUD BOLT

PRODUCT INFORMATION

- 전용 pull stud bolt 의 경우 주문제작 합니다.
- Special pull stud bolt can be ordered.

PSB Code No.	MTB2	MTB3	MTB4	MTB5
BT30 - MPS - 16	MPS - 16-2	MPS - 16 -3		
- 17	MPS - 17-2	MPS - 17 -3		
BT40 - MPS - 1		MPS - 1 -3	MPS - 1 -4	
- 2		MPS - 2 -3	MPS - 2 -4	
- 806		MPS - 806-3	MPS - 806 -4	
- G51		MPS - G51-3	MPS - G51-3	
BT50 - MPS - 5				MPS- 5-5
- 6				MPS- 6-5
- 0				MPS- 0-5



MT No.	MT No.
1	M 6 x 1,0
2	M10 x 1,5
3	M12 x 1,75
4	M16 x 2,0
5	M20 x 2,5