

SIDE LOCK HOLDER


Coolant-through hole

Clamping Range : $\phi 6.0 \sim \phi 42.0$

CODE No.

BT50	SLA32	105
Shank	Chucking Dia	Length

TAPER 접촉을 80% 이상 진동없음.

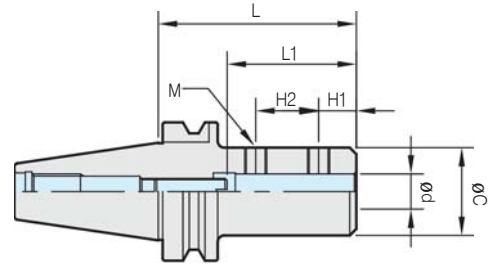

PRODUCT INFORMATION

■ 드릴, 엔드밀 기타(Small chuck, Special tool)를 사용 할 수 있습니다.

■ SIDE LOCK HOLDER can use tool holder for drill, endmill, etc.

Code No.	ød	L	øC	H		H1	H2	M	Weight (kg)
				Min	Max				
BT30 - SLA 6 - 60	6	60	25	20	35	18	-	M 5	0.7
SLA 8 - 60	8		28	25	40			M 6	0.8
SLA10 - 75	10	75	35	35	45	14	15	M 8	0.9
SLA12 - 75	12		40	40	50	15	16	M10	1.0
SLA16 - 75	16		45	50	65	16	20	M12	1.1
SLA20 - 75	20		48	55	70	18		24	M14
SLA25 - 85	25	85				1.3			
SLA32 - 105	32	105	58	65	80	20	22		1.5
BT40 - SLA 6 - 75	6	75	25	20	35	20	-	M 5	1.2
SLA 8 - 75	8		30	25	40	18		M 6	1.2
SLA10 - 90	10	90	35	35	45	14	15	M 8	1.3
SLA12 - 90	12		40	40	50		16	M10	1.4
SLA16 - 90	16		45	50	65	20	20	M12	1.5
SLA20 - 90	20		50	55	70	25		25	M16
SLA25 - 90	25		52				2.0		
SLA32 - 90	32	105	62	65	80	25	25	M16	2.2
SLA40 - 105	40		72						2.5
SLA42 - 105	42		76						2.6
BT50 - SLA 6 - 90	6	90	25	20	35	18	-	M 5	3.7
SLA 8 - 90	8		28	25	40			M 6	3.9
SLA10 - 90	10		35	35	45	14	15	M 8	4.1
SLA12 - 90	12		40	40	50		16	M10	4.2
SLA16 - 90	16	105	45	50	65	20	20	M12	4.2
- 105			4.4						
SLA20 - 105	20	135	50	60	75	25		M14	4.4
- 135			4.6						
SLA25 - 105	25	105	52				4.4		
- 135		135					4.7		
- 165		165		5.1					
SLA32 - 105	32	105	62	65	80	25	25	M16	4.8
- 135		135							5.4
- 165		165							6.2
SLA40 - 105	40	105	72						5.2
- 135		135		5.5					
SLA42 - 105	42	105	76	5.8					
- 135		135		6.0					

▶ 사이드락홀더 스페어 파트는 P64

▶ The spare parts for SIDE LOCK HOLDER are referred. P64