

SIDE LOCK HOLDER


Coolant-through hole

Clamping Range : $\phi 6.0 \sim \phi 42.0$

CODE No.

BT50	SLA32	105
Shank	Chucking Dia	Length

TAPER 접촉을 80% 이상 진동없음.

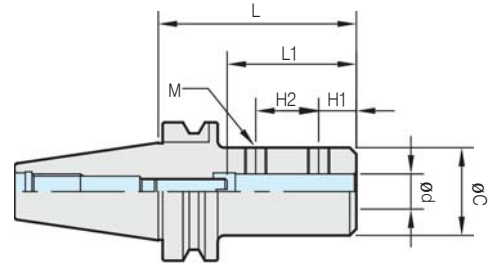

PRODUCT INFORMATION

■ 드릴, 엔드밀 기타(Small chuck, Special tool)를 사용 할 수 있습니다.

■ SIDE LOCK HOLDER can use tool holder for drill, endmill, etc.

Code No.	ød	L	øC	H		H1	H2	M	Weight (kg)
				Min	Max				
BT30 - SLA 6 - 60	6	60	25	20	35	18	-	M 5	0.7
SLA 8 - 60	8		28	25	40			M 6	0.8
SLA10 - 75	10	75	35	35	45	14	15	M 8	0.9
SLA12 - 75	12		40	40	50	15	16	M10	1.0
SLA16 - 75	16		45	50	65	16	20	M12	1.1
SLA20 - 75	20		48	55	70	18		24	M14
SLA25 - 85	25	85				25	1.3		
SLA32 - 105	32	105	58	65	80	20	22		1.5
BT40 - SLA 6 - 75	6	75	25	20	35	20	-	M 5	1.2
SLA 8 - 75	8		30	25	40	18		M 6	1.2
SLA10 - 90	10	90	35	35	45	14	15	M 8	1.3
SLA12 - 90	12		40	40	50		16	M10	1.4
SLA16 - 90	16		45	50	65	20	20	M12	1.5
SLA20 - 90	20		50	55	70	25		25	M16
SLA25 - 90	25	52	2.0						
SLA32 - 90	32	105	62	65	80	25	25	M16	2.2
SLA40 - 105	40		72						2.5
SLA42 - 105	42		76						2.6
BT50 - SLA 6 - 90	6	90	25	20	35	18	-	M 5	3.7
SLA 8 - 90	8		28	25	40			M 6	3.9
SLA10 - 90	10		35	35	45	14	15	M 8	4.1
SLA12 - 90	12		40	40	50		16	M10	4.2
SLA16 - 90	16	105	45	50	65	20	20	M12	4.2
- 105			4.4						
SLA20 - 105	20	135	50	60	75	25		M14	4.4
- 135			4.6						
SLA25 - 105	25	105	52	65	80	25	M16	4.4	
- 135		135						4.7	
- 165		165						5.1	
SLA32 - 105	32	105	62	65	80	25	25	M16	4.8
- 135		135							5.4
- 165		165							6.2
SLA40 - 105	40	105	72	65	80	25	25	M16	5.2
- 135		135							5.5
SLA42 - 105	42	105	76	65	80	25	25	M16	5.8
- 135		135							6.0

▶ 사이드락홀더 스페어 파트는 P64

▶ The spare parts for SIDE LOCK HOLDER are referred. P64


LONG TYPE SIDE LOCK HOLDER

Coolant-through hole

Clamping Range : $\phi 6.0 \sim \phi 63.0$

CODE No.

BT50	SLA32	200
Shank	Chucking Dia	Length

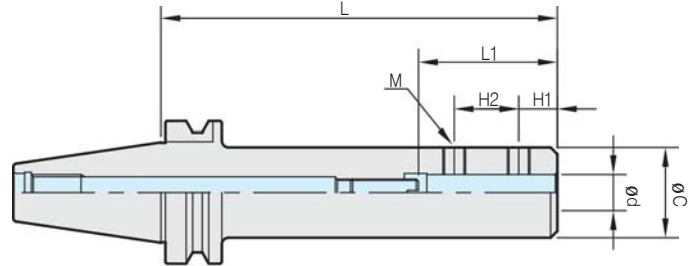

PRODUCT INFORMATION

■ drill, endmill, 기타(small chuck, special tool) 등을 사용 할 수 있습니다.
 ○ Saddle pin type(DIN1835C) endmill용 입니다.

■ SIDE LOCK HOLDER can use tool holder for drill, endmill, etc.
 ○ Saddle pin type(DIN1835C) endmill type.

Code No.	ϕd	L	ϕC	H		H1	H2	M	Weight (kg)
				Min	Max				
BT50 - SLA 6 - 105	6	105	25	20	35	18		M 5	4.4
- 150		150							5.3
- 200		200							5.8
- 250		250							6.5
※ - 300		300							1.3
※ - 350		350							6.2
SLA 8 - 105	8	105	28	25	40	14	15	M 6	4.4
- 150		150							5.3
- 200		200							5.8
- 250		250							6.5
- 300		300							7.3
※ - 350		350							8.3
SLA10 - 105	10	105	35	35	45	14	15	M 8	4.4
- 150		150							5.3
- 200		200							5.8
- 250		250							6.6
- 300		300							7.5
※ - 350		350							8.5
SLA12 - 105	12	105	40	40	50	15	16	M10	4.4
- 150		150							5.3
- 200		200							5.9
- 250		250							6.8
- 300		300							7.8
※ - 350		350							8.8
SLA16 - 150	16	150	45	50	65	16	20	M12	4.8
- 200		200							5.6
- 250		250							6.2
- 300		300							7.1
※ - 350		350							8.2
※ - 400		400							9.8
SLA20 - 150	20	150	50	60	75	18	20	M14	4.8
- 200		200							5.6
- 250		250							6.2
- 300		300							7.1
※ - 350		350							8.3
※ - 400		400							10.0

▶ 사이드락홀더 스페어 파트는 P64
 ▶ ※ 표시된 제품은 센터홀이 없습니다.

▶ The spare parts for SIDE LOCK HOLDER are referred. P64
 ▶ "※" indicate that it does not have centre through hole.

LONG TYPE SIDE LOCK HOLDER


Coolant-through hole

Clamping Range : $\phi 6.0 \sim \phi 63.0$

CODE No.

BT50 SLA32 200

Shank Chucking Dia Length

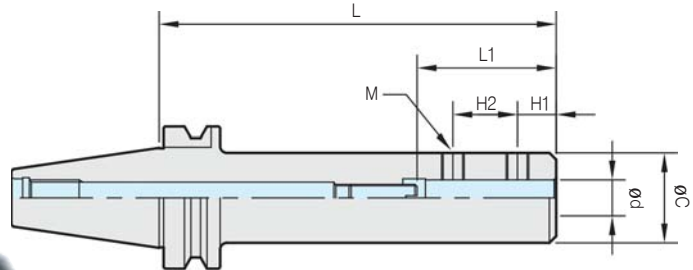

BT SHANK

LONG TYPE SIDE LOCK HOLDER

PRODUCT INFORMATION

- drill, endmill, 기타(small chuck, special tool) 등을 사용 할 수 있습니다.
- ⊙ Saddle pin type(DIN1835C) endmill용 입니다.

- Side lock holder is using as a tool hilder for drill, endmill, ETC.
- ⊙ Saddle pin type(DIN1835C) endmill type.

Code No.	ød	L	øC	H		H1	H2	M	Weight (kg)		
				Min	Max						
BT50 - SLA25 - 150	25	150	52	60	75	25	20	M14	4.8		
- 200		200							5.6		
- 250		250							6.8		
※ - 300		300							7.9		
※ - 350		350							8.9		
※ - 400		400							10.8		
SLA32 - 150	32	150	62	65	82		25	M16	5.6		
- 200		200							6.8		
- 250		250							7.9		
※ - 300		300							8.9		
※ - 350		350							11.0		
※ - 400		400							14.0		
SLA40 - 150	40	150	76	65	82				25	M16	5.8
- 200		200									7.0
- 250		250									8.1
※ - 300		300									9.0
※ - 350		350									12.1
※ - 400		400									15.0
SLA42 - 150	42	150	76	65	80		25	M16			6.0
- 200		200									7.2
- 250		250									8.9
※ - 300		300									9.8
※ - 350		350									13.0
※ - 400		400									17.0
SLA50 - 105	50	105	88	50	82				28	M18	6.4
- 150		150									8.2
- 200		200									9.8
- 250		250									10.9
※ - 300		300									14.5
※ - 350		350									18.0
※ - 400	400	22.0									
⊕ SLA50.8 - 121	50.8	121	95	50	84	34	36	M20			5.0

- ▶ 사이드락홀더 스페어 파트는 P64
- ▶ ※ 표시된 제품은 센터홀이 없습니다.

- ▶ The spare parts for SIDE LOCK HOLDER are referred, P64
- ▶ "※" indicate that it does not have centre through hole.

MOLD SIDE LOCK HOLDER

Coolant-through hole

Clamping Range : $\phi 3.0 \sim \phi 32.0$

CODE No.

BT50

MSL12


150

S

Shank
Chucking Dia

Length

Gage line not included

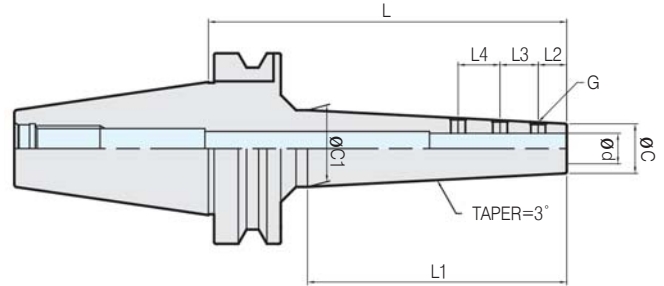MAX
20,000
min⁻¹


BT SHANK

MOLD SIDE LOCK HOLDER

PRODUCT INFORMATION

- 쉽고 빠른 공구교환
- 높은 정밀도
- 슬림한 디자인으로 간섭부위 최소화
- Easy and quick tool exchange.
- Excellent accuracy.
- Minimize interference area by slim design.

Code No.	ød	øC	øC1	L	L1	L2	L3	L4	G	MAX rpm	Weight (kg)	
BT40 - MSL 3 - 135	3	10	20	135	94	6	6	-	M3	20,000	1.3	
MSL 4 - 135	4	11	21				7		M4		1.3	
MSL 6 - 135	6	13	23			12	M6		1.4			
MSL 8 - 135	8	15	25			13.5			1.4			
MSL10 - 150	10	17	29	150	109	15	20	16	M8	15,000	1.6	
MSL12 - 150	12	22	34				16				1.7	
BT50 - MSL12 - 150S	12	22	37	188	136	15	16	16	M8	15,000	4.4	
- 200S			42	238	186					12,000	5.0	
MSL16 - 150S	16	26	41	188	136		20	22		15,000	4.6	
- 200S			46	238	186					12,000	5.1	
- 250S			51	288	236					10,000	5.9	
MSL20 - 150S			45	188	136					15,000	4.7	
- 200S	20	30	50	238	186					12,000	5.3	
- 250S			55	288	236					10,000	6.0	
MSL25 - 150S			25	35	50			188	136	M10	15,000	4.8
- 200S					55			238	186		12,000	5.4
- 250S	60	288			236			10,000	6.2			
MSL32 - 150S	55	188			136			15,000	5.0			
- 200S	32	42	60	238	186			12,000	5.6			
- 250S			65	288	236			10,000	6.4			

- ▶ MSL홀더 볼트는 SELUX 전용 볼트를 사용하시기 바랍니다.
- ▶ 육각렌치는 별도 판매 입니다.
- ▶ S Type는 표준길이(+38mm)

- ▶ Please only use SELUX private bolt for MSL HOLDER.
- ▶ Wrench is ordered separately.
- ▶ S type is extended by 38mm compare to standard type.

MSL BOLT

Item	Size	Length/pcs	chuck
MSL3 - BS	M3*0.5P	5mm / 2pcs.	MSL3
MSL4 - BS	M4*0.5P	5mm / 2pcs.	MSL4
MSL6 - BS	M6*0.75P	5, 6mm / 1pcs. Each	MSL6
MSL8 - BS		5, 6mm / 1pcs. Each	MSL8
MSL10 - BS		5, 6mm / 1pcs. Each	MSL10
MSL12 - BS	M8*0.75P	7mm / 1pcs, 8mm / 1pcs, 9mm / pcs.	MSL12
MSL16 - BS		7mm / 1pcs, 8mm / 1pcs, 9mm / pcs.	MSL16
MSL20 - BS		7mm / 1pcs, 8mm / 1pcs, 9mm / pcs.	MSL20
MSL25 - BS	M10*10P	7mm / 1pcs, 8mm / 1pcs, 9mm / pcs.	MSL25
MSL32 - BS		6mm / 1pcs, 7mm / 1pcs, 8mm / pcs.	MSL32