

SIDE LOCK HOLDER


Coolant-through hole
Clamping Range : $\phi 6.0 \sim \phi 42.0$

CODE No.

HSK63A SLA32 125
Shank Chucking Dia Length



TAPER 접촉을 80% 이상 진동없음.

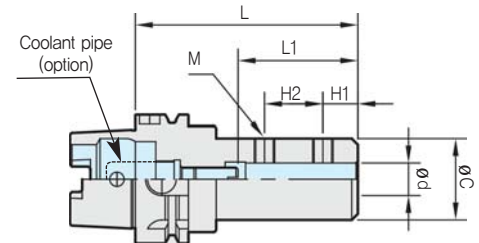

PRODUCT INFORMATION

■ Drill, endmill, 기타(small chuck, special tool)등을 사용할 수 있습니다. ■ SIDE LOCK HOLDER can use tool holder for drill, endmill, etc.

Code No.	ϕd	L	ϕC	H		H1	H2	M	Weight (kg)
				Min	Max				
HSK63A - SLA	6 - 75	75	25	20	35	18	-	M 5	1.0
	8 - 80	80	28	25	40			M 6	1.2
	SLA10 - 90	90	35	35	50	14	13	M 8	1.2
	SLA12 - 90	90	40				16	M10	1.2
	SLA14 - 105	105	42	50	65	20	20	M12	1.4
	SLA16 - 105	105	44						1.4
	SLA20 - 115	115	50	55	68			M14	1.7
	SLA25 - 115	115	52						1.7
	SLA32 - 120	120	63		72	25	25	M16	2.2
	SLA40 - 125	125	73	65	80				2.4
	SLA42 - 125	125							2.6
HSK100A - SLA	6 - 80	80	25	20	35	18	-	M 5	3.1
	8 - 85	85	28	25	40			M 6	3.1
	SLA10 - 95	95	35	35	50	14	13	M 8	3.3
	SLA12 - 95	95	40				16	M10	3.5
	SLA14 - 110	110	42	50	65	20	20	M12	3.5
	SLA16 - 110	110	44						3.6
	SLA20 - 120	120	50	60	75			M14	3.8
	SLA25 - 120	120	52						3.9
	SLA32 - 125	125	63			25	25	M16	4.0
	SLA40 - 135	135	75	65	80				4.3
	SLA42 - 135	135							4.5

▶ 사이드락홀더 스페어 파트는 P64
▶ 내부급유 쿨런트 파이프는 P100

▶ The spare parts for SIDE LOCK HOLDER are referred. P64
▶ The Coolant pipe are referred. P100