


SSK COLLET CHUCK

Coolant-through hole

Clamping Range : $\phi 1.0 \sim \phi 25.4$

CODE No.

BT50	SSK10	135
Shank	Chucking Dia	Length

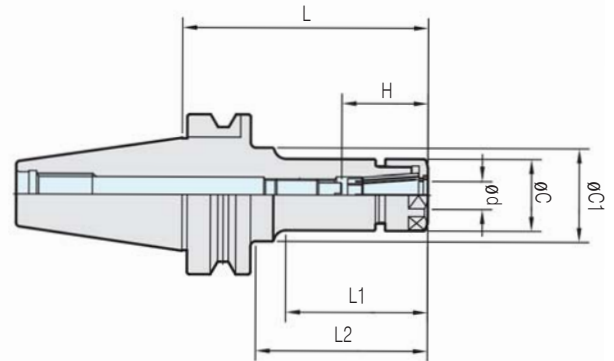

PRODUCT INFORMATION

- 8° Taper 의 강력한 파지력
- 높은 정밀도와 빠른 가공에 적합
- 드릴, 센터드릴, 엔드밀, 탭, 리머용으로 사용
- Powerful clamping force of 8° Taper.
- Excellent Run-out Accuracy.
- SSK COLLET CHUCK is suitable for a various operation using drill, endmill, tap and reamer.

Code No.	ød	L	øC	øC1	H		L1	L2	Collet	Weight (kg)
					Min	Max				
BT30 - SSK 6 - 60	0,9~6,0	60	19,5	19,5	21	35	33	33	SC6	0,7
- 90		90		32			56	65		0,7
SSK10 - 45	1,75~10,0	45	27,5	27,5	30	50	22	22	SC10	0,8
- 60		60					35	35		0,9
- 90		90					65	65		1,0
- 120		120					95	95		1,1
SSK13 - 60	2,75~13,0	60	33	33	31 31	50 65	35	35	SC13	1,0
- 90		90					65	65		1,1
- 120		120					95	95		1,2
SSK16 - 60	2,75~16,0	60	40	40	45 45	60 65	37	37	SC16	1,1
- 90		90					67	67		1,2
- 120		120					97	97		1,3
SSK20 - 75	3,6~20,0	75	48,5	48,5	65 65	70 75	53	53	SC20	1,0
- 90		90					67	67		1,2
SSK25 - 90	16,0~25,4	90	55	55	55	75	67	67	SC25	1,5
BT40 - SSK 6 - 60	0,9~6,0	60	19,5	19,5	21	35	30	30	SC6	1,0
- 90		90		32			51	60		1,1
- 120		120		25			60	90		1,4
- 150		150					60	120		1,5
SSK10 - 60	1,75~10,0	60	27,5	27,5	30	50	32	32	SC10	1,1
- 90		90		40			48	60		1,2
- 120		120		34,5 39			73	90		1,4
- 150		150						118		1,6
- 180		180						148		1,6
SSK13 - 60	2,75~13,0	60	33	33	31	65	28	28	SC13	1,2
- 90		90					58	58		1,4
- 120		120		40			88	88		1,6
- 150		150						118		1,8
- 180		180						148		1,8
SSK16 - 60	2,75~16,0	60	40	40	50	65	32	32	SC16	1,3
- 90		90			40	67	58	58		1,5
- 120		120			40	70	88	88		1,7
- 150		150					118	118		1,9
- 180		180					148	148		2,0
SSK20 - 60	3,6~20,0	60	48,5	48,5	47	60	32	32	SC20	1,3
- 90		90			47	80	60	60		1,6
- 120		120					90	90		2,0
- 150		150					47	90		118
- 180		180			148	148				2,9