

ENDMILL COLLET CHUCK



Coolant-through hole


Clamping Range : $\phi 6.0 \sim \phi 20.0$

CODE No.

HSK63A SE25 105
Shank SE collet Size Length



Fig1

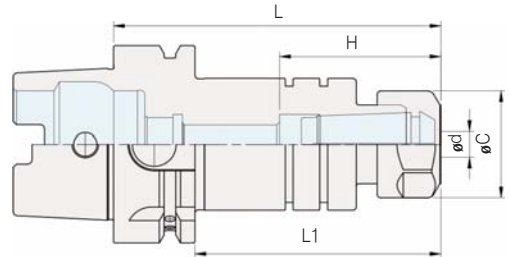

HSK SHANK

ENDMILL COLLET CHUCK

PRODUCT INFORMATION

- SE척 전용 콜릿 사용
- ENDMILL 전용 COLLET CHUCK
- 4도 TAPER의 강력한 파지력
- $5\mu m$ at 4D (T.I.R) (Max G2.5 at 20,000 rpm)
- Please use dedicated collet for SE COLLET CHUCK
- SE COLLET CHUCK for dedicated ENDMILL
- Strong Clamping Power of 4 degree TAPER
- $5\mu m$ at 4D (T.I.R) (Max G2.5 at 20,000 rpm)

CODE NO.	ϕd	ϕC	H	L	L1	Collet	Weight (kg)	Fig
HSK63A - SE20 - 100	6,8,10,12	34	40,5	100	74	SE20	1,2	1
HSK63A - SE25 - 105	6,8,10,12,16	42	48	105	79	SE25	1,4	
HSK63A - SE32 - 110	6,8,10,12,16,20	50	58	110	84	SE32	1,6	
HSK100A - SE20 - 105	6,8,10,12	34	40,5	100	74	SE20	2,3	
HSK100A - SE25 - 110	6,8,10,12,16	42	48	105	79	SE25	2,5	
HSK100A - SE32 - 120	6,8,10,12,16,20	50	58	110	84	SE32	2,7	

Spare Parts				
Type	Option			
	NUT	Adjust Screw	Spanner	SE Collet
SE20	UM/SE20(HEXA)	BTD1325-C	SE20-SP	SE20- ϕ
SE25	UX/SE25	BTD1830-C	SE25-SP	SE25- ϕ
SE32	UX/SE32	BTD2230-C	SE32-SP	SE32- ϕ

- ▶ SE NUT와 ER NUT은 호환성이 있으나 SE너트로 별도 구매 바랍니다. (ER NUT를 SE CHUCK에 사용을 금지합니다.)
- ▶ 스패너는 별도 구매 입니다.
- ▶ SE콜릿은 P147
- ▶ Nut has compatible with SE NUT and ER NUT. But Please order separately when you need NUT. (Prohibit that SE CHUCK use ER NUT)
- ▶ Spanner is ordered separately
- ▶ SE COLLET is referred. P147