

FACE MILL ARBOR

CODE No.

BT50





FMA25.4

45

Shank

Cutter Type

Length

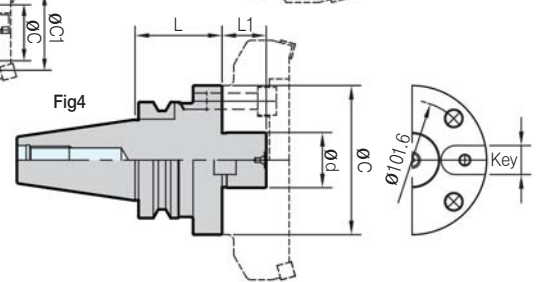BT SHANK
FACE MILL ARBOR

PRODUCT INFORMATION

■ JIS B4113 face milling용 입니다.


■ For face-milling cutter conforming to JIS B4113.

Code No.	ød	Cutter Dia	L	øC	C1	L1	L2	Key	K	Fig	Weight (kg)
BT30 - FMA25,4 - 45	25,4	80	45	50		22		K9,5 - S	5	3	0,8
FMA31,75 - 45	31,75	100		60		30		K12,7 - S	7		1,0
BT40 - FMA25,4 - 45	25,4	80	45	50	-	22	-	K9,5 - S	5	1	1,4
- 90			90					K9,5 - L			3,0
FMA31,75 - 45	31,75	100	45	60		30		K12,7 - S	7		2,0
- 75			75					K12,7 - S			3,2
FMA38,1 - 60	38,1	125	60	80		34	K15,85 - S	9	3	3,8	
BT50 - FMA25,4 - 45	25,4	80	45	50		22	25	K9,5 - S	5	1	3,8
- 90			90		60			K9,5 - L		2	4,5
-150			150		70						5,5
FMA31,75 - 45	31,75	100	45	60	-	30	-	K12,7 - S	7	1	4,6
- 75			75					K12,7 - L		2	5,2
-105			105		70	30	25				5,5
-150			150								7,0
FMA38,1 - 45	38,1	125	45	80	-	34	-	K15,85 - S	9	1	4,3
- 75			75					K15,85 - L			5,0
-105			105								5,5
-150			150								8,5
FMA50,8 - 45	50,8	160	45	100	-	36	-	K19 - S	10		4,8
- 75			75					K19 - S			6,8
-105			105								7,8
FMA47,625 - 75	47,625	200	75	128,5		38		K25,4	12,5	4	7,6

▶ 페이스밀아바 스페어 파트는 P75

▶ The spare parts for FACE MILL ARBOR are referred. P75

FACE MILL ARBOR

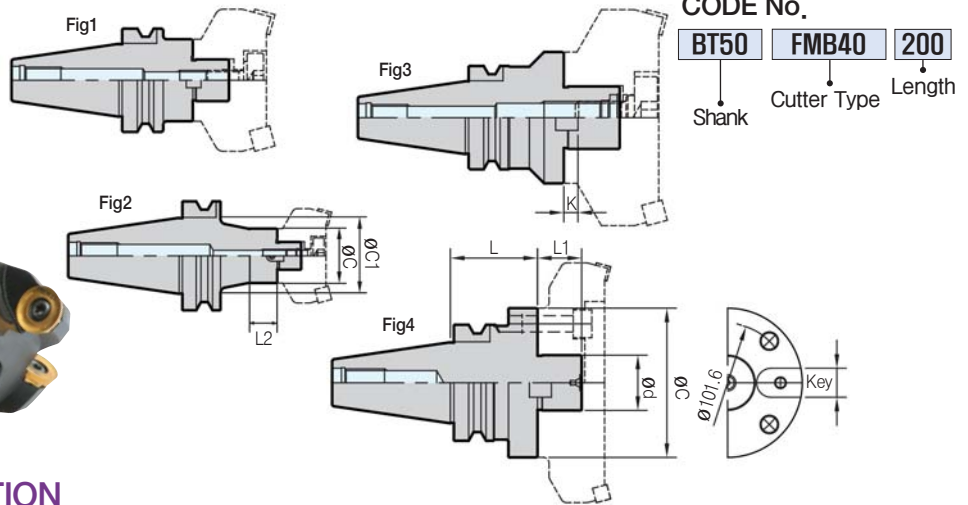

PRODUCT INFORMATION

- JIS B4113 face milling용 입니다.
- (S)Type은 표준길이(+38mm)


- For face-milling cutter conforming to JIS B4113.
- S type is extended by 38mm compare to standard type.

Code No.	ød	Cutter Dia	L	øC	L1	Key	K	Fig	Weight (kg)			
BT30-FMB25,4 - 45	25,4	80	45	80	26	K9,5-S	5	3	1,5			
BT30-FMB27 - 45	27		45			6	1,8					
BT40-FMB25,4 - 60	25,4	80	60	80	26	K9,5-L	5	3	3,6			
- 90			90						4,8			
BT40-FMB38,1 - 60	38,1	100	60	85		K15,85-S	9		3,6			
BT40-FMB27 - 60	27	80	60	80		K12-L	6		3,6			
- 90			90					4,8				
BT40-FMB40 - 60	40	100	60	85		K15,85-S	8,5	1	3,8			
BT50-FMB25,4 - 45	25,4	80	45	80		26	K9,5-L	5	1	4,0		
- 90			90		5,8							
-150			150		8,0							
BT50-FMB38,1 - 45	38,1	100	45	K15,85-S	9		4	4,6				
- 75			75	85				K15,85-L	6,0			
-105			105	110					8,8			
BT50-FMB38,1F - 75	38,1	160	75	110	26		K12-S	6	1	5,0		
BT50-FMB27 - 45	27	80	45	80						K12-L	8,5	4,0
- 90			90									5,8
-150			150				9,2					
BT50-FMB40 - 45	40	100	45	85		K15,85-L	8,5	4		4,6		
- 75			75							6,0		
-105			105							8,7		
-150			150							11,5		
-200			200							14,5		
-250			250							17,5		
-300			300		20,5							
-350			350		23,6							
-400			400		27,5							
BT50-FMB40F - 75		160	75	110	12,5		4		6,6			
-105			105			8,9						
-150			150			11,8						
-200			200			14,9						
-250			250			18,2						
BT50-FMB60 - 75	60	200	75	140		25		K25,4	12,5	21,2		
-105			105							7,9		
-150			150							9,8		
-200			200							12,5		
-250			250							15,8		
			20,0									

FACE MILL ARBOR

CODE No.

BT50 FMC22 105
Shank Cutter Type Length

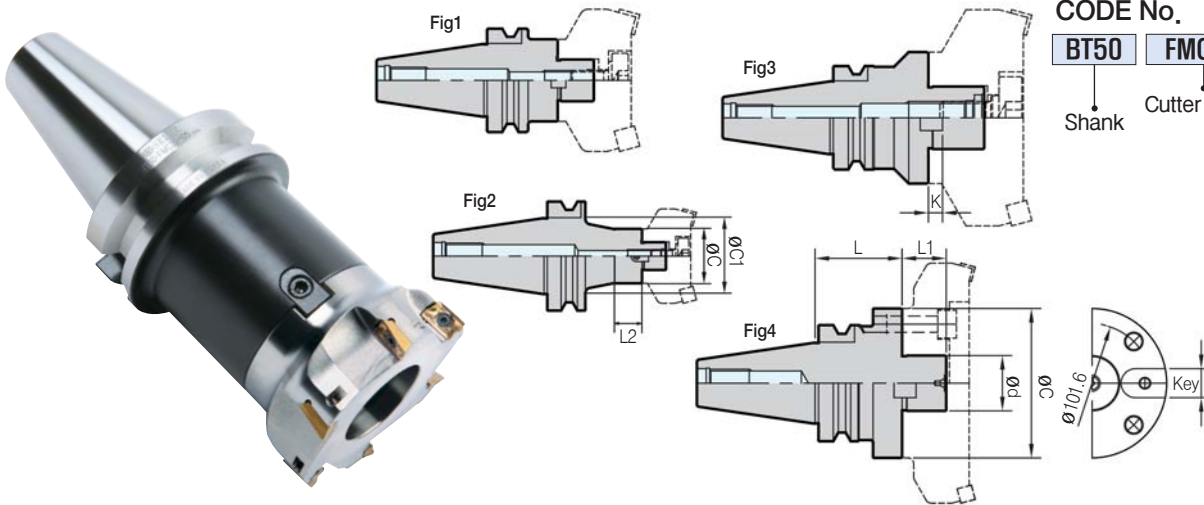

PRODUCT INFORMATION


- JIS B4113 face milling용 입니다.
- (S)Type은 표준길이(+38mm)
- For face-milling cutter conforming to JIS B4113.
- S type is extended by 38mm compare to standard type.

Code No.	ød	Cutter Dia	L	øC	øC1	L1	L2	Key	K	Fig	Weight (kg)
BT30 - FMC16 - 45	16	40	45	38	-	16	-	K8-S	5	1	1.2
FMC22 - 45	22	50/63	90	45	-	18	-	K10-S	5.5	1	1.5
- 90								K12-S	6	3	1.5
FMC27 - 45	27	63/80	45	60	-	20	-	K14-S	7	3	2.0
FMC32 - 45	32	100	45	80	-	22	-	K15,85-S	7	3	4.7
BT40 - FMC16 - 45	16	40	45	38	-	16	-	K8-S	5	1	1.7
FMC22 - 45	22	50/63	90	45	-	18	-	K10-S	5.5	1	2.0
- 90								K10-L	5.5	1	2.2
FMC25,4 - 60	25.4	63/80	60	70	-	20	-	K9,5-S	6	3	2.5
- 90			90	60	-	20	-	K12-S	6	1	2.7
FMC27 - 60	27	63/80	60	60	-	20	-	K12-L	6	1	2.5
- 90			90	60	-	20	-	K12-L	6	1	3.4
FMC32 - 60	32	100	60	80	-	22	-	K14-S	7	3	3.4
- 90			90	80	-	22	-	K14-L	7	3	3.8
FMC38,1 - 60	38.1	100	60	85	-	22	-	K15,85-S	7	3	4.7
- 90			90	85	-	22	-	K15,85-L	7	3	5.0
FMC40 - 60	40	125/160	60	90	-	26	-	K15,85-S	8	4	5.2
BT50 - FMC16 - 60	16	40	60	38	-	16	-	K8-S	5.0	1	3.2
FMC22 - 60	22	50/63	105	45	-	18	-	K10-S	5.5	1	3.6
- 105								K10-L	5.5	2	5.5
- 150(50)			150	58	48	18	25	K10-L	5.5	2	7.3
- 150(63)					63						7.3
FMC25,4 - 45	25.4	63/80	45	70	-	20	-	K9,5-S	6	1	4.1
- 90			90	60	-	20	-	K9,5-L	6	1	6.0
- 150			150	60	-	20	-	K12-S	6	1	7.9
FMC27 - 45	27	63/80	45	60	-	20	-	K12-L	6	1	5.0
- 90			90	60	-	20	-	K12-L	6	1	6.0
- 150(63)			150	68	-	20	-	K12-L	6	1	7.5
- 150(80)											7.5
FMC32 - 45	32	100	45	80	-	22	-	K14-S	7	1	5.0
- 75			75	80	-	22	-	K14-L	7	1	6.0
- 105			105	80	-	22	-	K14-L	7	1	6.8
- 150			150	85	-	22	-	K14-L	7	1	9.8
FMC38,1 - 45	38.1	100	45	85	-	22	-	K15,85-S	7	1	5.8
- 75			75	85	-	22	-	K15,85-L	7	1	6.0
- 105			105	85	-	22	-	K15,85-L	7	1	7.0
FMC40 - 45	40	125/160	45	90	-	26	-	K15,85-S	8	4	6.2
- 75			75	90	-	26	-	K15,85-L	8	4	6.8

▶ 페이스밀아바 스페어 파츠는 P75

▶ The spare parts for FACE MILL ARBOR are referred. P75

FACE MILL ARBOR



CODE No.

BT50


FMH22

105

Shank

Cutter Type

Length

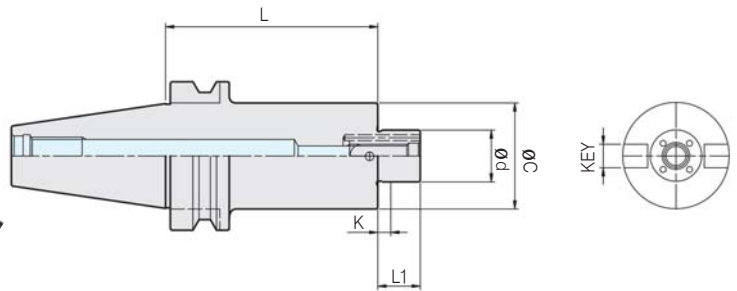

PRODUCT INFORMATION

- 쿨런트 컷터 전용
- Only use coolant cutter.
- 컷터 가공성 향상 공구사용시간 증가
- Improve tool life and cutting operation

Code No.	ød	øC	L	L1	K	KEY	Weight (kg)
BT30 - FMH16 - 45	16	38	45	16	5	K8-S	1.2
FMH22 - 45	22	45	90	18	5.5	K10-S	1.5
- 90							1.5
FMH27 - 45	27	60	45	20	6	K12-S	1.5
BT40 - FMH16 - 45	16	38	45	16	5	K8-S	1.7
FMH22 - 45	22	45	90	18	5.5	K10-S	2.3
- 90						K10-L	2.2
FMH27 - 60	27	60	60	20	6	K12-S	2.5
- 90			90			K12-L	3.4
FMH32 - 60	32	80	60	22	7	K14-S	3.4
FMH25,4 - 60	25,4	70	90	20	6	K9,5-S	2.5
- 90							2.7
FMH31,75 - 60	31,75	76	60	30	7	K12,7-S	2.7
- 90			90				3.2
FMH38,1 - 60	38,1	85	60	34	9	K15,85-S	4.7
- 90			90			K15,85-L	5.0
BT50 - FMH22 - 60			60			K10-S	3.6
- 105	22	45	105	18	5.5		5.5
- 150			150			K10-L	7.3
FMH27 - 90	27	60	90	20	6	K12-L	6.0
- 150			150				7.5
FMH32 - 90	32	80	90	22	7	K14-L	6.5
- 150			150				8.0
FMH25,4 - 90	25,4	70	90	20	6	K9,5-L	6.0
- 150			150				7.9
FMH31,75 - 90	31,75	76	90	30	7	K12,7-L	6.2
- 150			150				8.5
FMH38,1 - 90	38,1	85	90	34	9	K15,85-L	7.0
- 150			150				9.0

▶ FMH 클램프볼트 및 부품은 일반 FMA, FMC 아바와 호환합니다.
▶ 페이스밀아바 스페어 파트는 P75

▶ FMH clamp bolt and other parts is compatible with FACE MILL ARBOR FMA, FMC.
▶ The spare parts for FACE MILL ARBOR are referred. P75