


SSK COLLET CHUCK

Coolant-through hole
Clamping Range : $\phi 1.0 \sim \phi 25.4$

CODE No.

SK40 **SSK10** **90**
Shank SC Collet Size Length

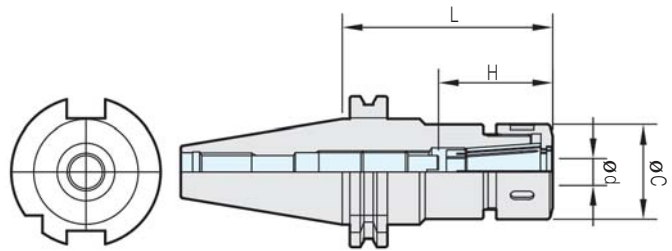

PRODUCT INFORMATION

- 8.Taper 의 강력한 파지력
- 높은 정밀도와 빠른 가공에 적합
- 드릴, 센터드릴, 엔드밀, 탭, 리머용으로 사용

- Powerful clamping force of 8 taper.
- Excellent Run-out Accuracy.
- SSK COLLET CHUCK is suitable for a various operation using drill, endmill, tap and reamer.

Code No.	ϕd	L	ϕC	H		Collet	Weight (kg)
				Min	Max		
SK40 - SSK 6 - 60	0.9~6.0	60	19.5	19	34	SC6	1.0
- 90		90					1.1
- 120		120					1.2
SSK10 - 60	1.75~10.0	60	27.5	30	50	SC10	1.2
- 90		90					1.5
- 120		120					1.8
- 150	2.75~13.0	150	33	36	60	SC13	2.0
SSK13 - 75		75					1.9
- 90		90					1.4
- 120	2.75~16.0	120	40	45	70	SC16	1.8
- 150		150					2.1
SSK16 - 75		75					1.3
- 90	3.6~20.0	90	48	50	75	SC20	1.4
- 120		120					2.0
- 150		150					2.5
SSK25 - 90	15.6~25.4	90	55	55	85	SC25	1.4
- 120		120					2.0
- 150		150					2.5
SK50 - SSK 6 - 105	0.9~6.0	105	19.5	21	32	SC6	3.8
- 135		135					4.0
- 165		165					4.2
SSK10 - 105	1.75~10.0	105	27.5	30	50	SC10	3.9
- 135		135					4.3
- 165		165					4.6
SSK13 - 105	2.75~13.0	105	33	36	60	SC13	4.0
- 135		135					4.4
- 165		165					4.6
SSK16 - 105	2.75~16.0	105	40	40	70	SC16	4.2
- 135		135					4.6
- 165		165					4.8
SSK20 - 105	3.6~20.0	105	48	50	75	SC20	4.5
- 135		135					4.7
- 165		165					4.9
SSK25 - 105	15.6~25.4	105	55	55	85	SC25	4.6
- 135		135					4.8
- 165		165					5.0